

Introduction to **VISTAVIEW™**



Contents

1. Mesh and Colours.....	3
2. Applications	4
3. Configurations	4
4. Features	6
5. Housing Sizes and Maximum Unit Dimensions.....	6
6. Mounting.....	7
7. Fastening	8
8. Recessed Option.....	9
9. Sill Adapter Options.....	10
10. L Flap Option.....	11
11. Other Considerations	11

VistaView screens are thoughtfully designed to provide a contemporary look, be simplistic in use, and ensure reliable, superior performance.

1. Mesh and Colours


Wizard offers a wide range of specialty mesh that suits the customers needs.

The beauty of the customer's panoramic view is maintained with the pleat-less mesh Wizard uses in all of our systems.




Colours are custom formulated for Wizard by Akzo Nobel - optional custom finishes and RAL colours are also available.


2. Applications




Multi - Sliding Doors




Bi-Fold Doors



Corner Openings



Split Height




French Doors


3. Configurations

Double screens can be **50:50 splits**. They can also be **off-centre splits**. This means that the tracks **do not** have to be cut to meet in the centre. The screen can also extend to either end.

***NOTE:** Pull-bars stop at the track joiners.

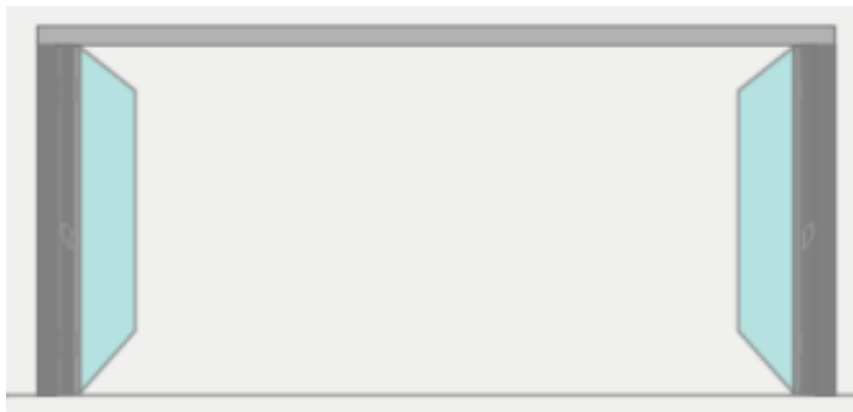

90° Corners are possible in post-less openings.

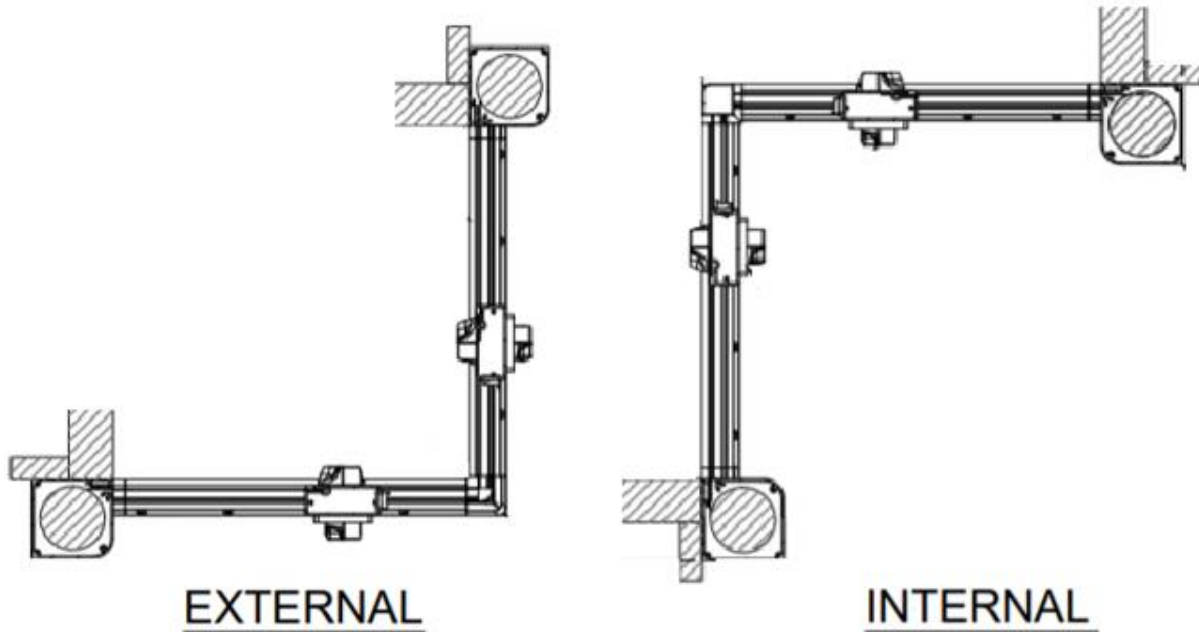

Internal Corner



***NOTE** - The *handle heights* are offset 4 ½".

4. Features



Auto-Stop

Homeowners gain full control with the convenience of unlimited stopping points. Automatically stops when the handle is released.



Captured Mesh

A zipper welded to the mesh keeps the screen tight, prevents blow-outs and gives strength to withstand high winds.



Recessed Track

VistaView screens can be recessed to provide a smooth transition and finished look.

5. Housing Sizes and Maximum Unit Dimensions

	Single (W x H)	Double (W x H)
60 mm [2 3/8"]	6' x 10'	12' x 10'
70 mm [2 3/4"]	10' x 10'	20' x 10'
80 mm [3 1/8"]	14' 6" x 11'	29' x 11'

6. Mounting


The VistaView can be mounted either **(1) onto the face** or **(2) under-header/in-jamb**.



7. Fastening

Housing


VistaView *housings* can be fastened through the **front, back, or inside** locations.

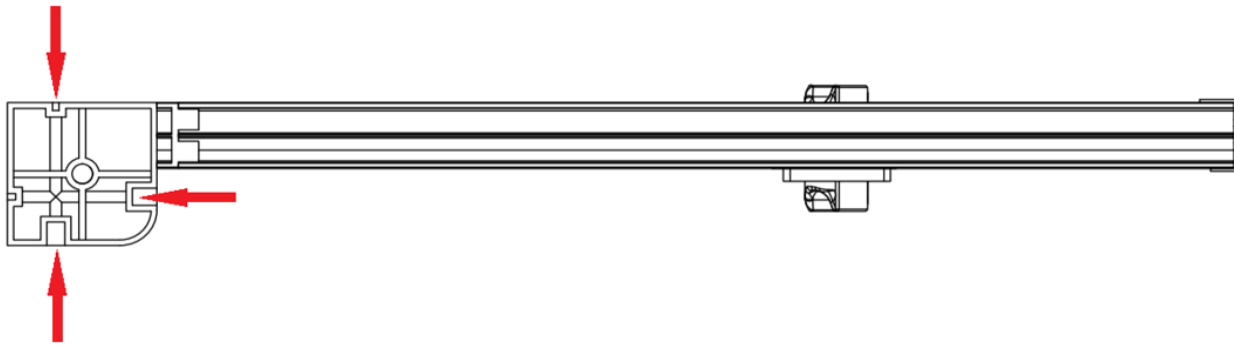

Tracks

Upper & Lower Tracks are **identical**.

Tracks can be fastened with screws oriented **vertically or horizontally** to suit install.

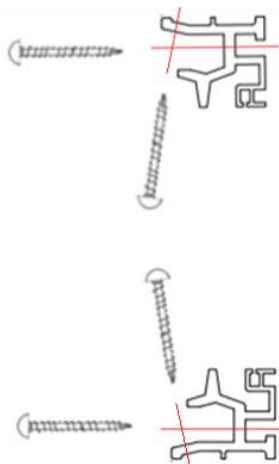

Optional Track Covers

Optional Track Covers can be ordered and applied to the tracks to conceal the screws (available in black).



8. Recessed Option

Lower tracks and *lower housing endcap* can be **recessed** into a *channel & cup*.




See [Recessed Installation Video](#)

9. Sill Adapter Options

Available in **80" lengths**. Orderable under "RetractaView Parts".

[Sill Adapters \(wizardscreens.com\)](http://wizardscreens.com)


***NOTE:** Sill Adapter standard colours do *not* match VistaView standard colours exactly.

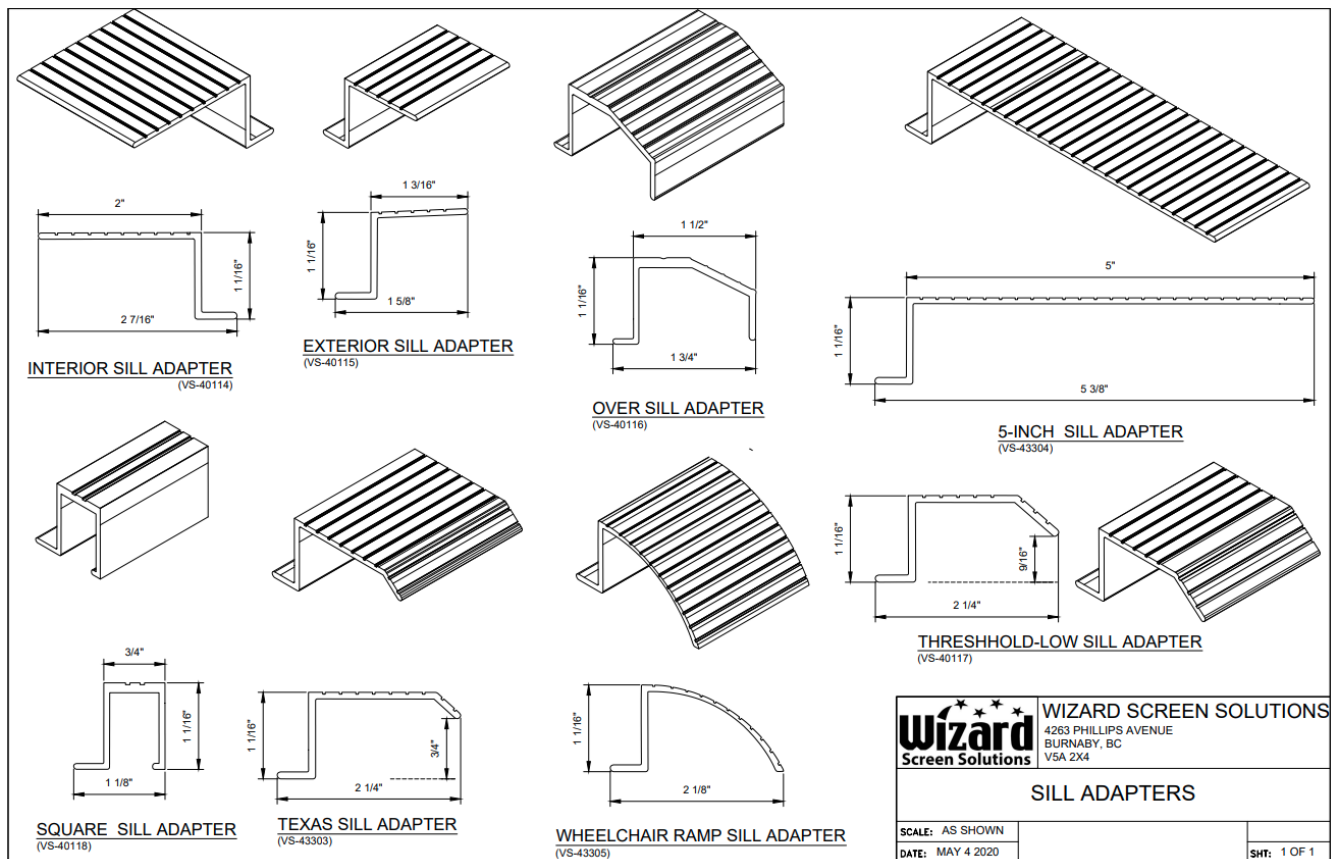

Details and Specifications subject to change

10. L Flap Option

Used with double-sided tape to eliminate gaps.
Orderable under “RetractaView Parts”.

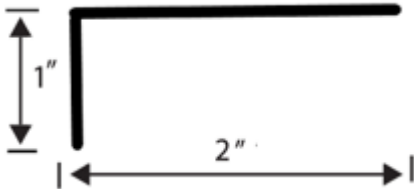

11. Other Considerations

Concealing

The VistaView *housing* and *upper track* should not be **concealed**. Otherwise, **ensure they can be removed easily** in the event the screen requires servicing. Do *not* embed the upper track into the header or ceiling. **It is the responsibility of the builder to develop removable trim work.** See [Recessed Installation Video](#)

Exterior Applications

If *lower tracks* are mounted on top of the threshold on the exterior where it is exposed to weather, it is recommended that **weep holes be drilled through the tracks**. *Track* pilot holes should be applied with dabs of **silicone sealant** before the screws are fastened.