



# BetterView

## Assembly and Installation

Pull-across  
(Window or Door)

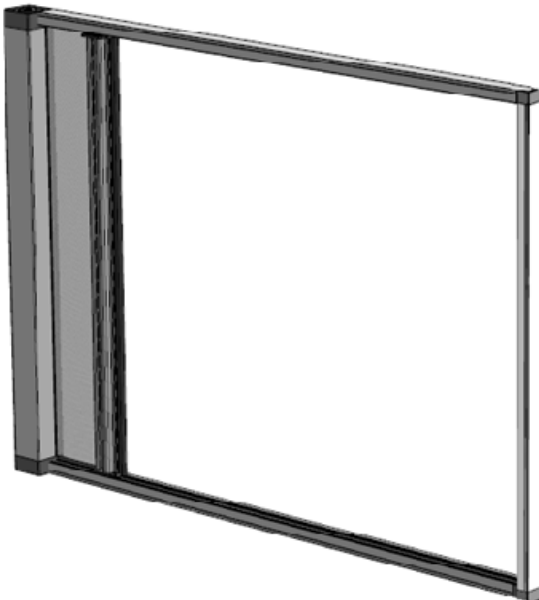

Pull-down  
(Window only)

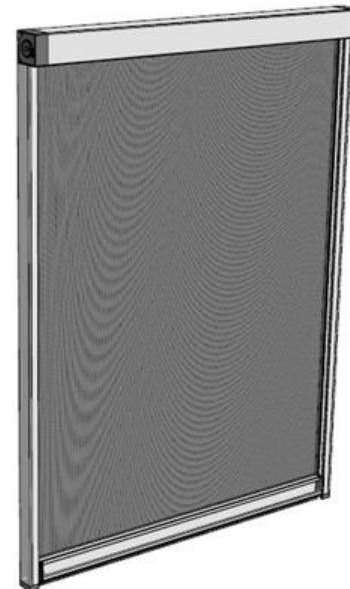

Spray tracks *only*  
with **dry silicone**.




**MUST** be installed **plumb, level,**  
**straight, and square.**

## REQUIRED

Level



Tape Measure



Pencil



9/64 and 1/8  
Drill Bits




#1 and #2  
Robertson  
Driver Bits



Dry Silicone  
Spray



Chop Saw



Drill



Step Ladder



Vacuum




## OPTIONAL


2-way Laser Level



Shims



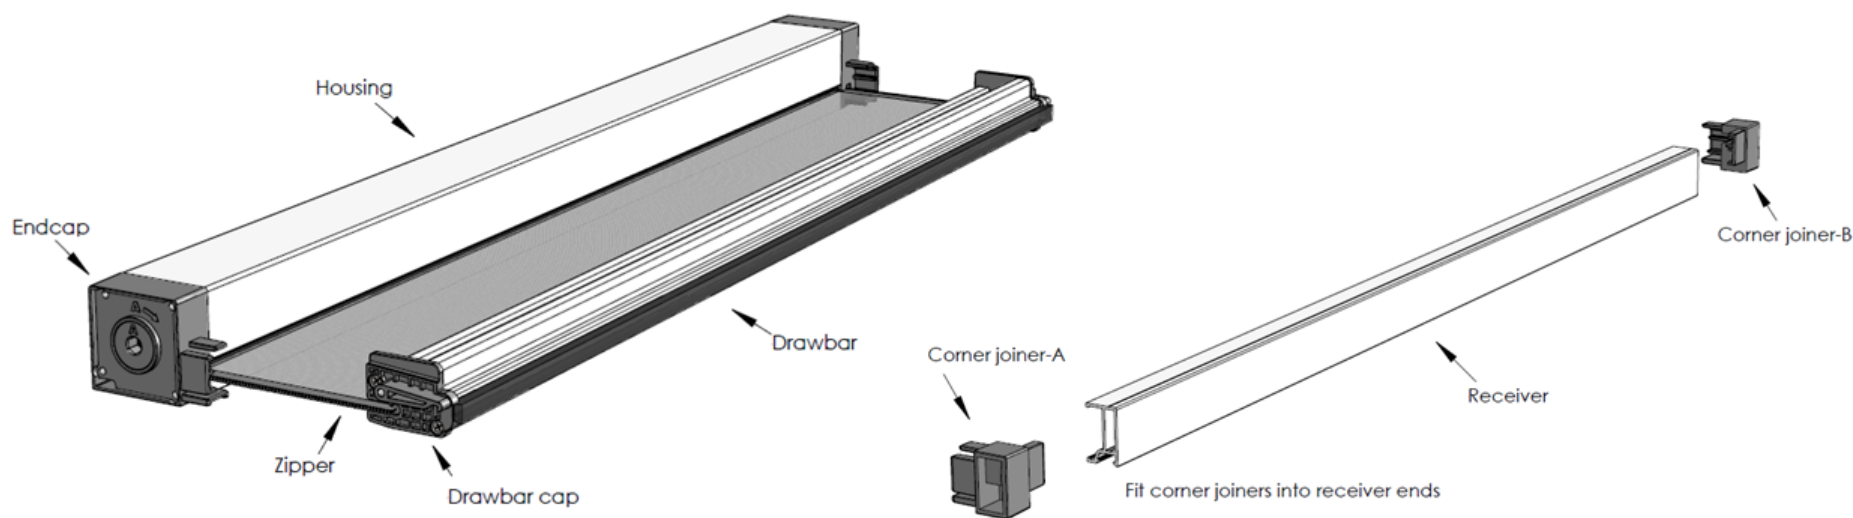


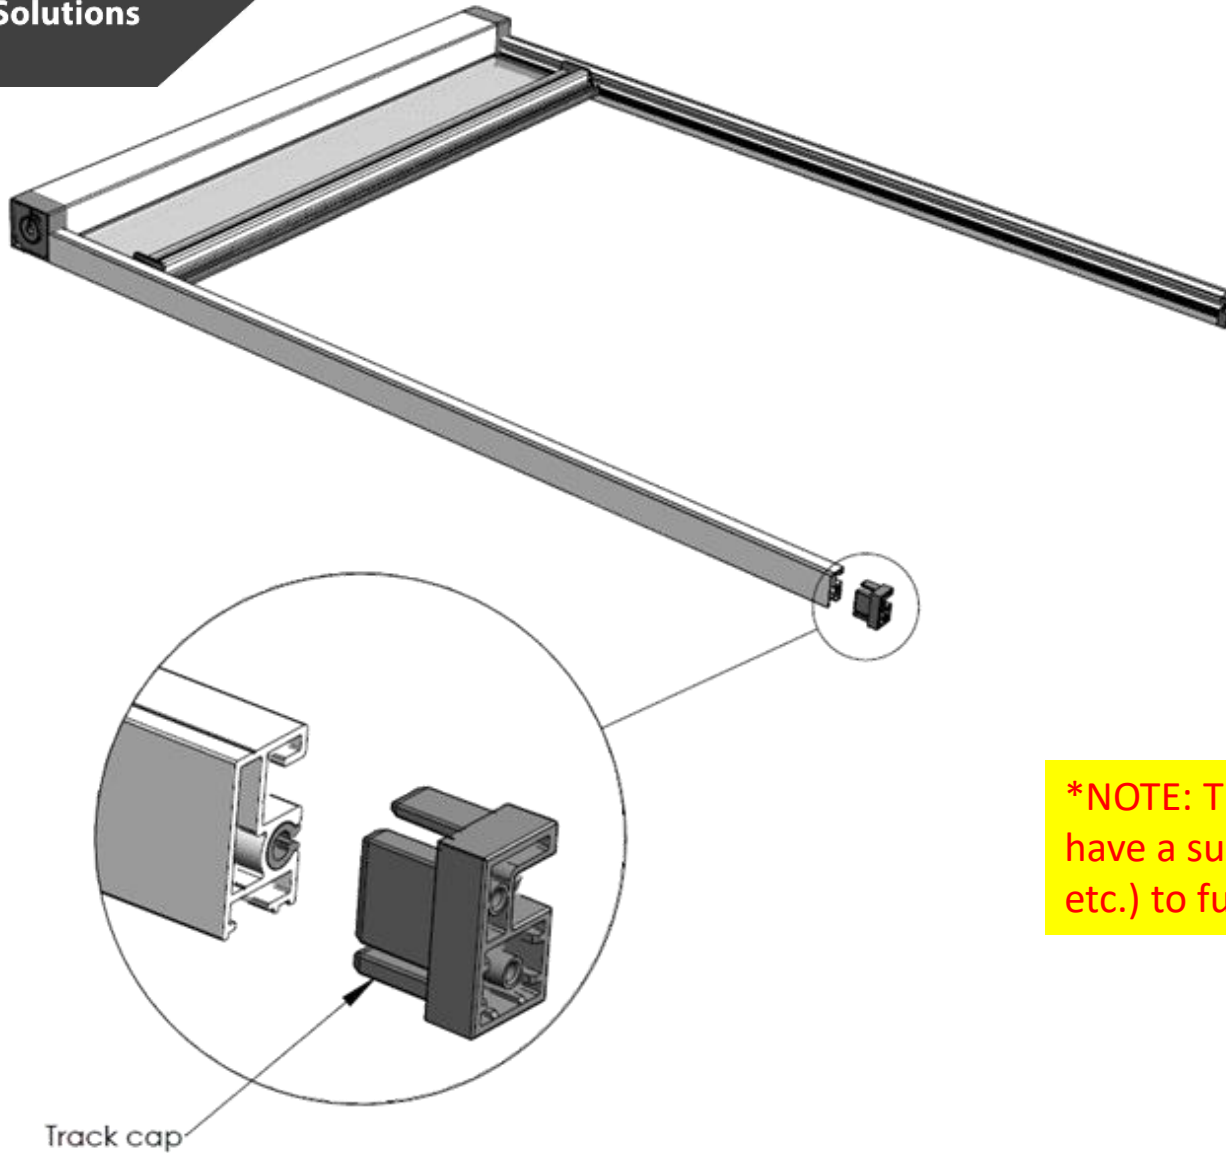


**\*NOTE:** The pullbar *must* have a surface (ie. Sill, Jamb, etc.) to fully seal against.

## Tracks


1. Cut to size
2. Prepare track runner entry end:
  - i. Slightly countersink
  - ii. Barely nip corners off
  - iii. Deburr
3. Insert track fully against housing

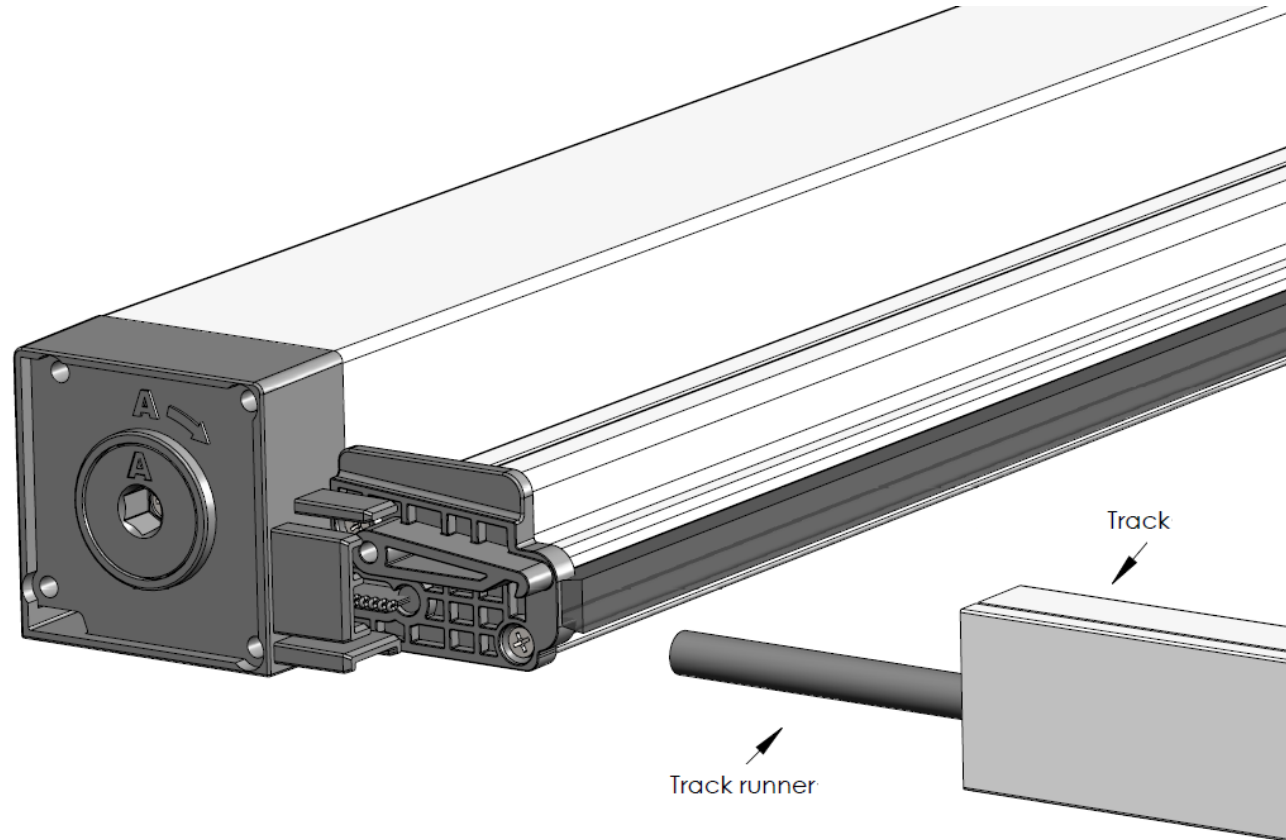

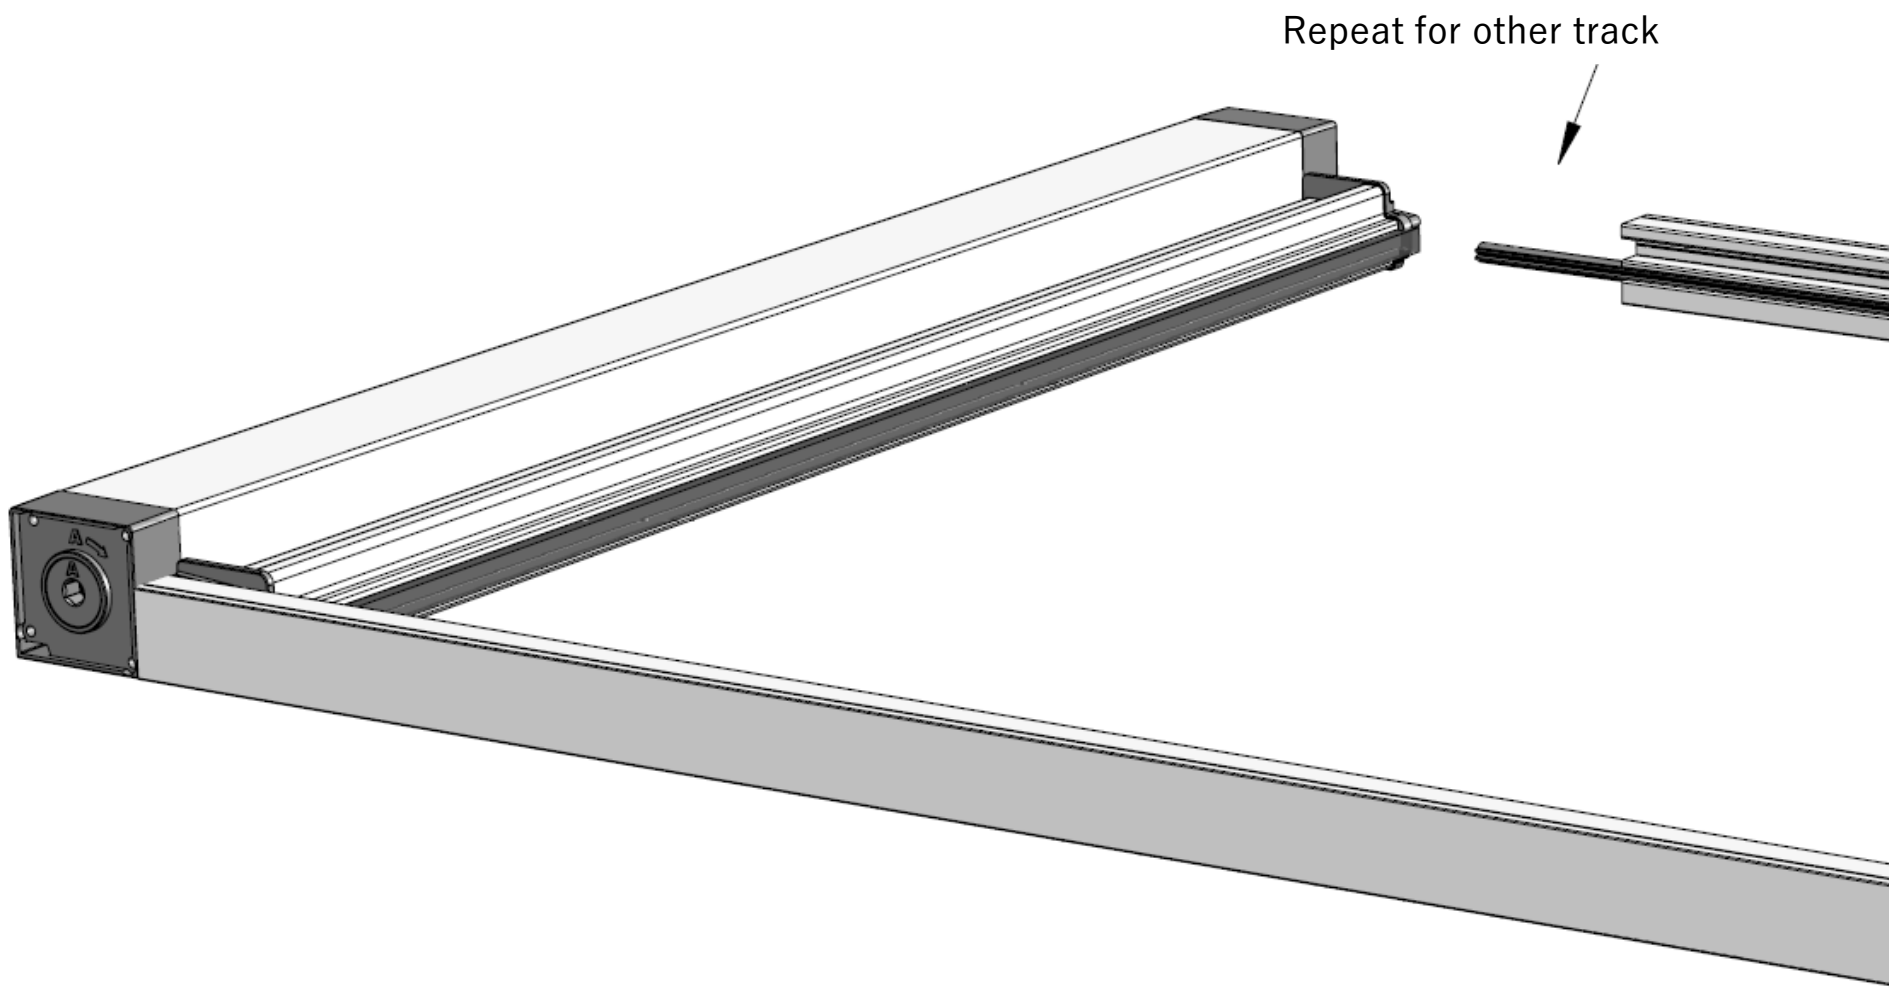


Put receiver or track caps onto tracks.

Pull-across *or* Pull-down  
(Window or Door)

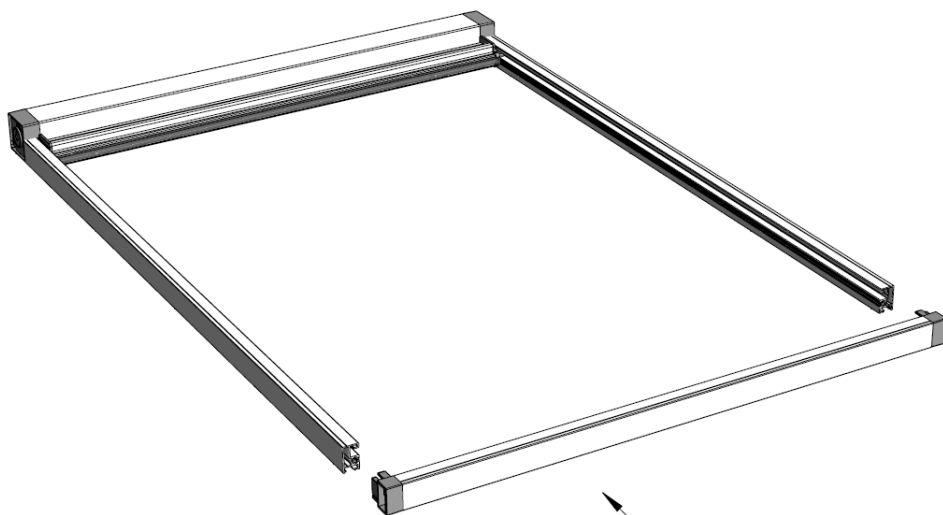

Assemble receiver into track ends


Pull-down  
(Window only)

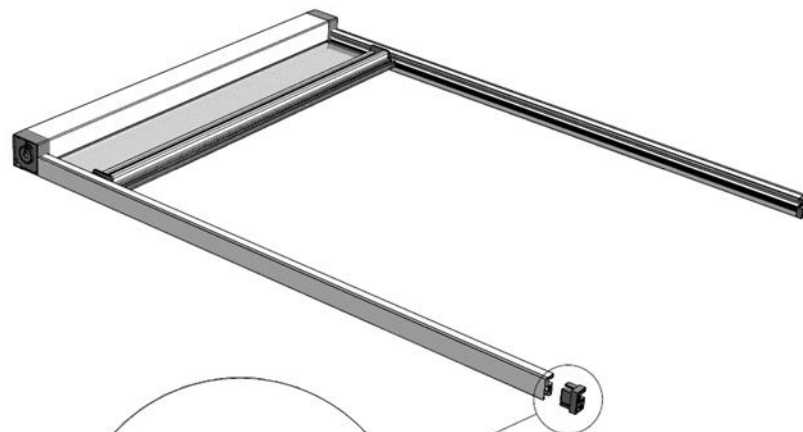


Track cap



Move pullbar across & lock into receiver before turning the screen over. This will increase rigidity of frame when handling.

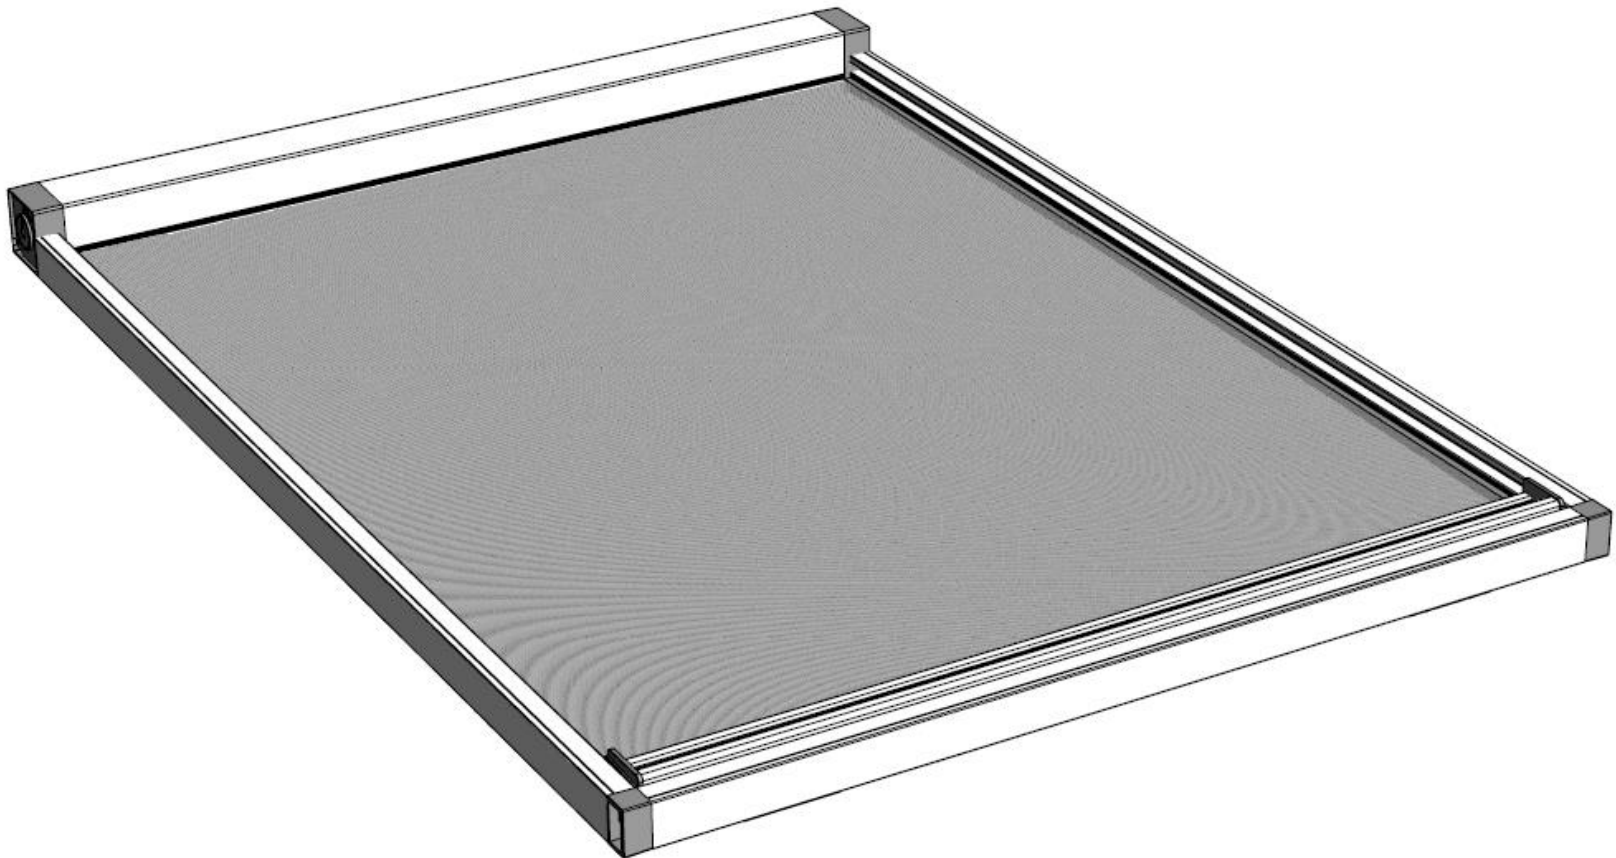


Secure corners with  
#6 x ½ PH ST screws

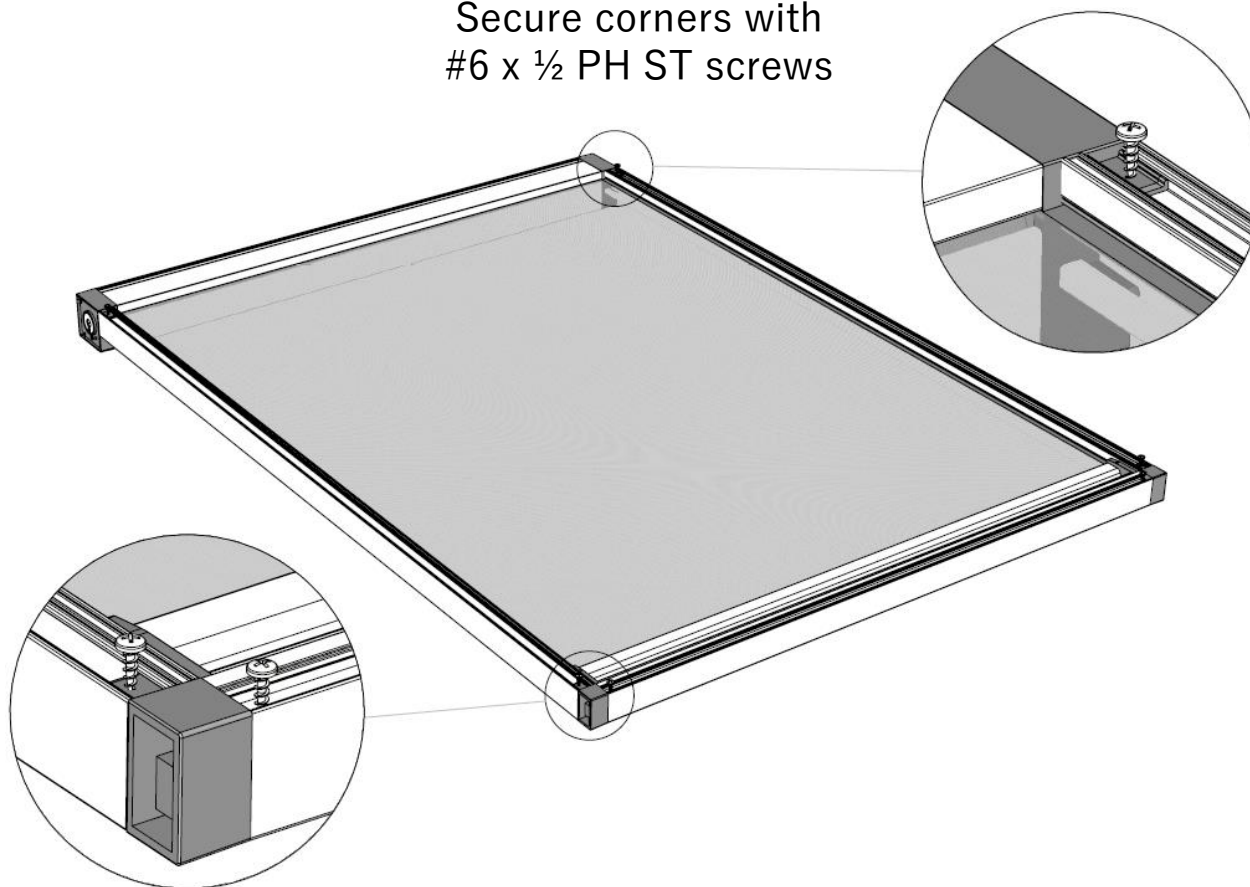

## ALTERNATIVELY


Unit may be assembled  
**face-down.**

Clips assist the mounting process  
(Surface Mount)

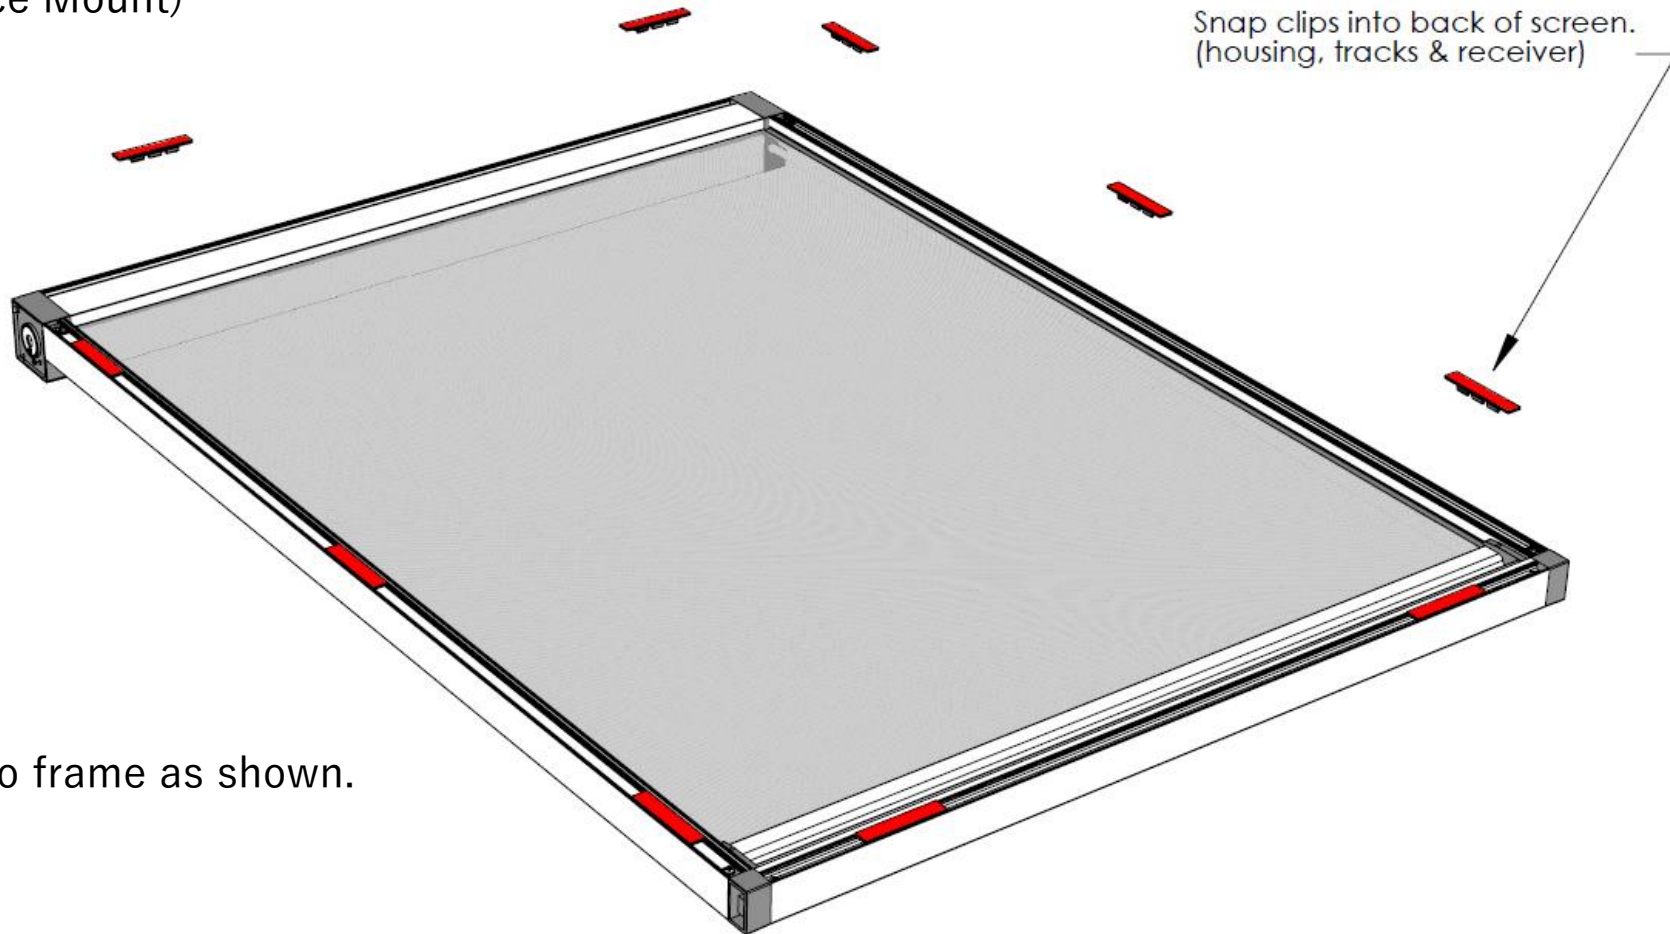


Clip into frame as shown.

TIP: You can temporarily stick a dowel pin to the tape to prevent accidental contact with the mounting surface during alignment. When ready to mount, remove the dowel and press down. Repeat this for each clip as needed.

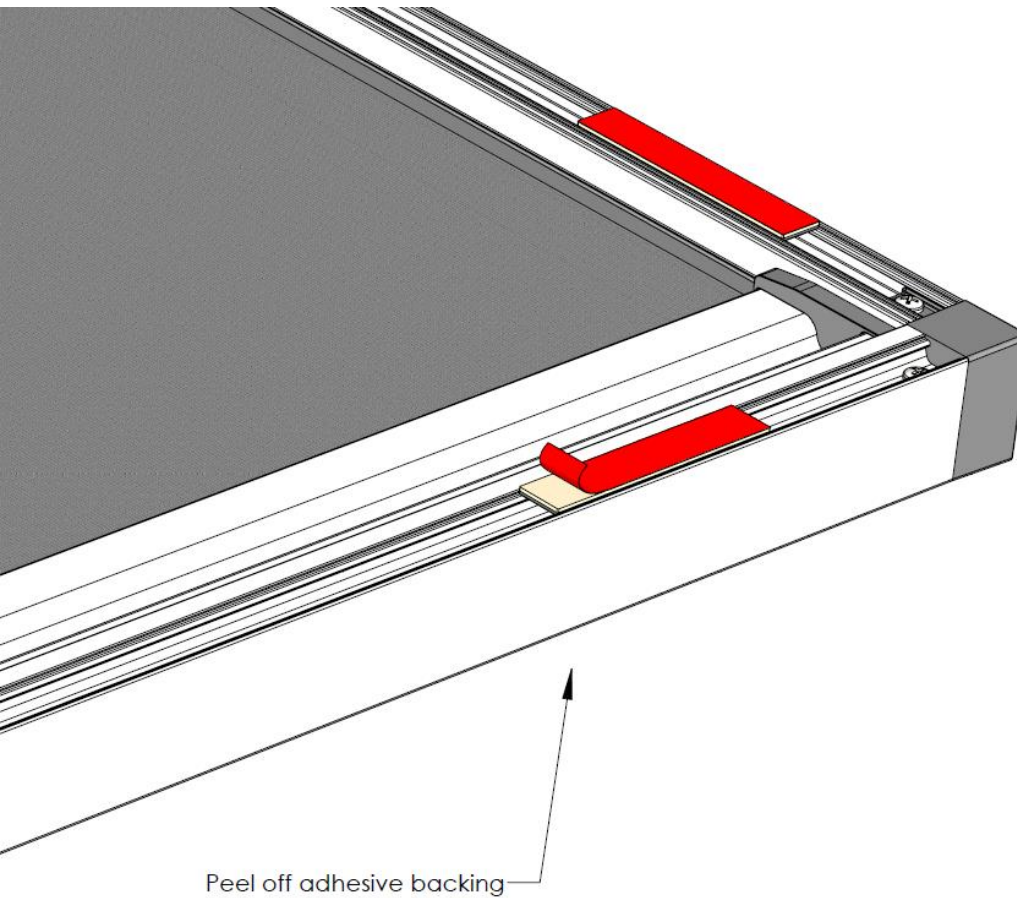

Section View

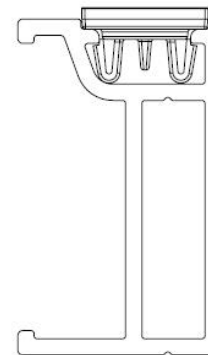



\*NOTE: If the **tensioner** will be *inaccessible* when in place, do the following:



Lean the unit against a wall (protecting surface) and test the function of the unit. If necessary, increase or decrease tension per the last 2 pages.



Apply plumb, level,  
straight, and square.

Locate receiver where it permits  
operability of the pullbar from either  
side.

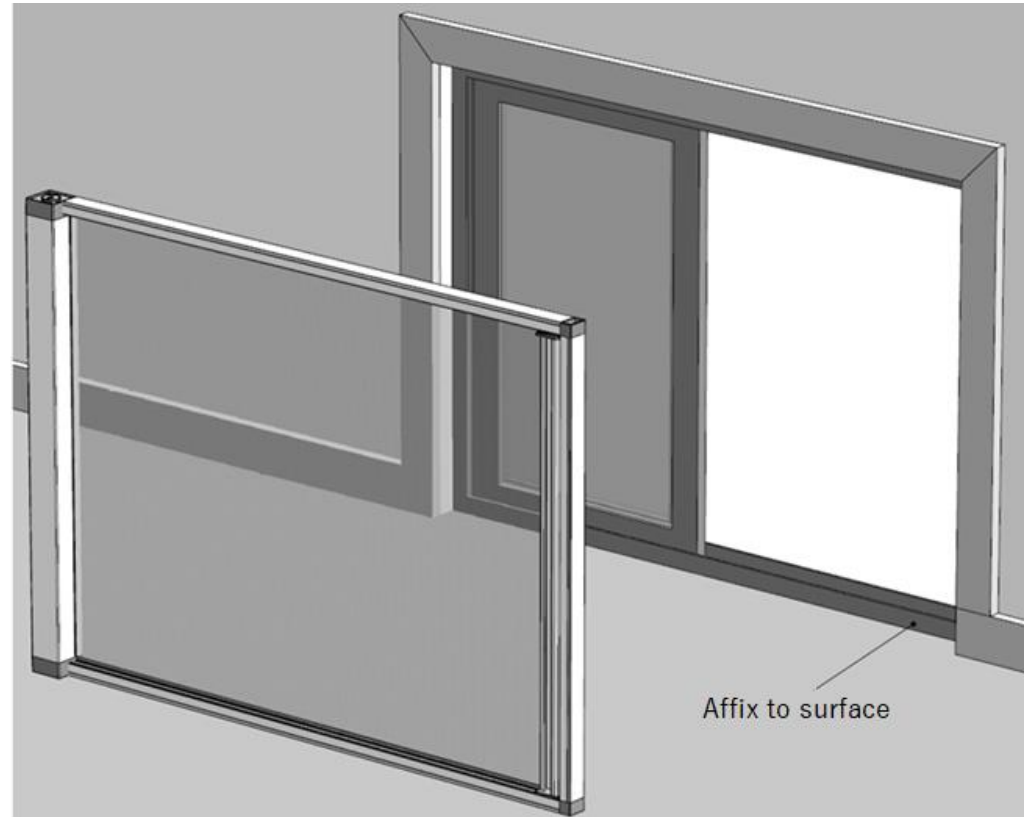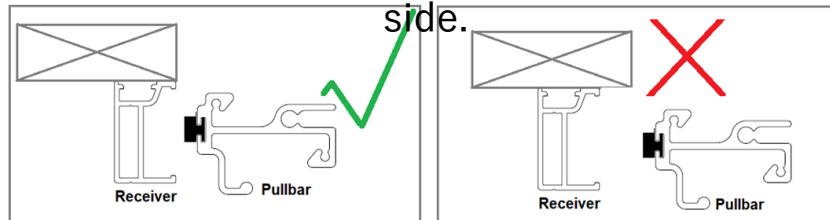


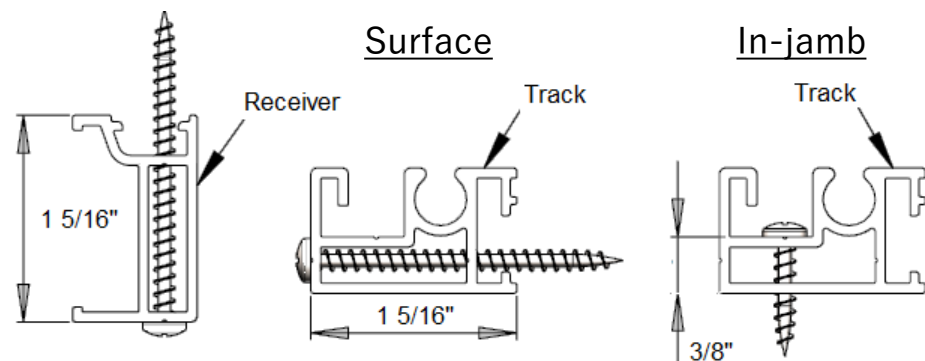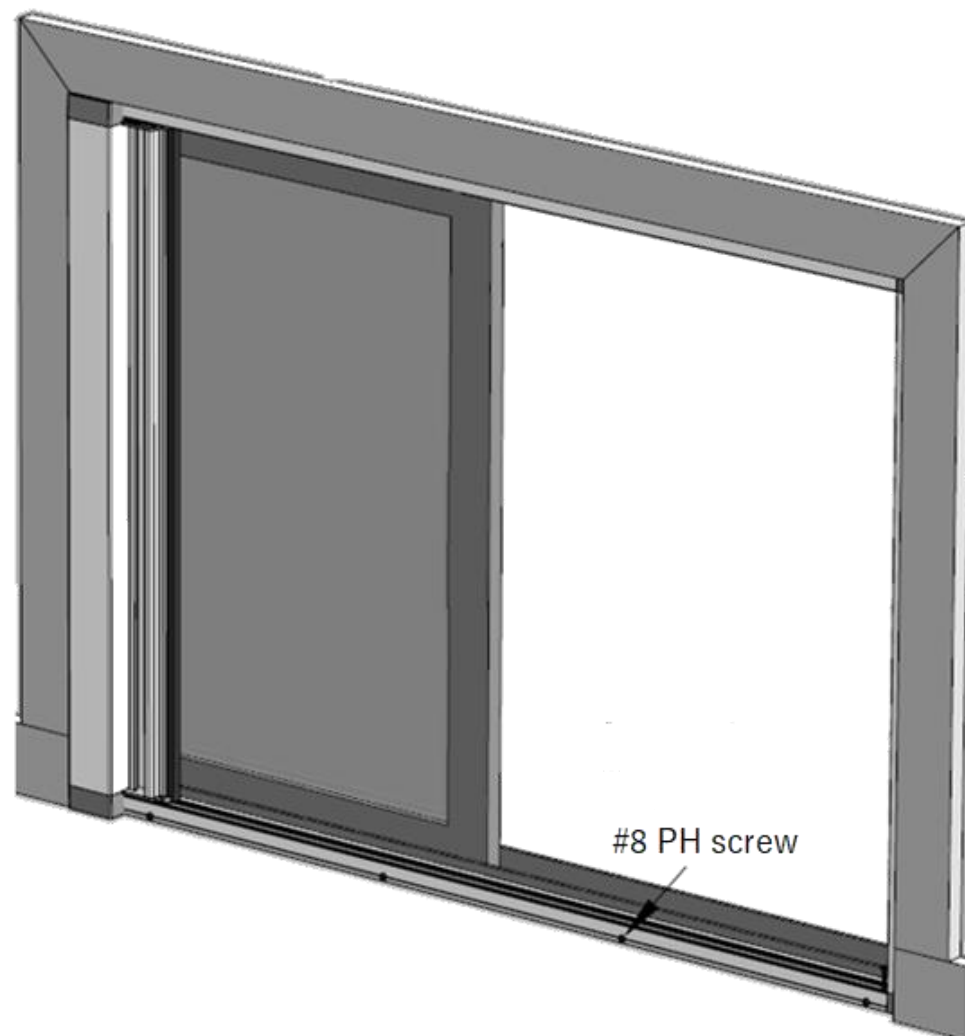




Affix tracks and receiver with #8  
PH painted screws approx. 4"  
from ends, then space 32" apart.



1. Pre-drill and countersink pilot holes through BetterView Sill Adapter (BSA)
2. Affix BSA to sill
3. Screw track into BSA

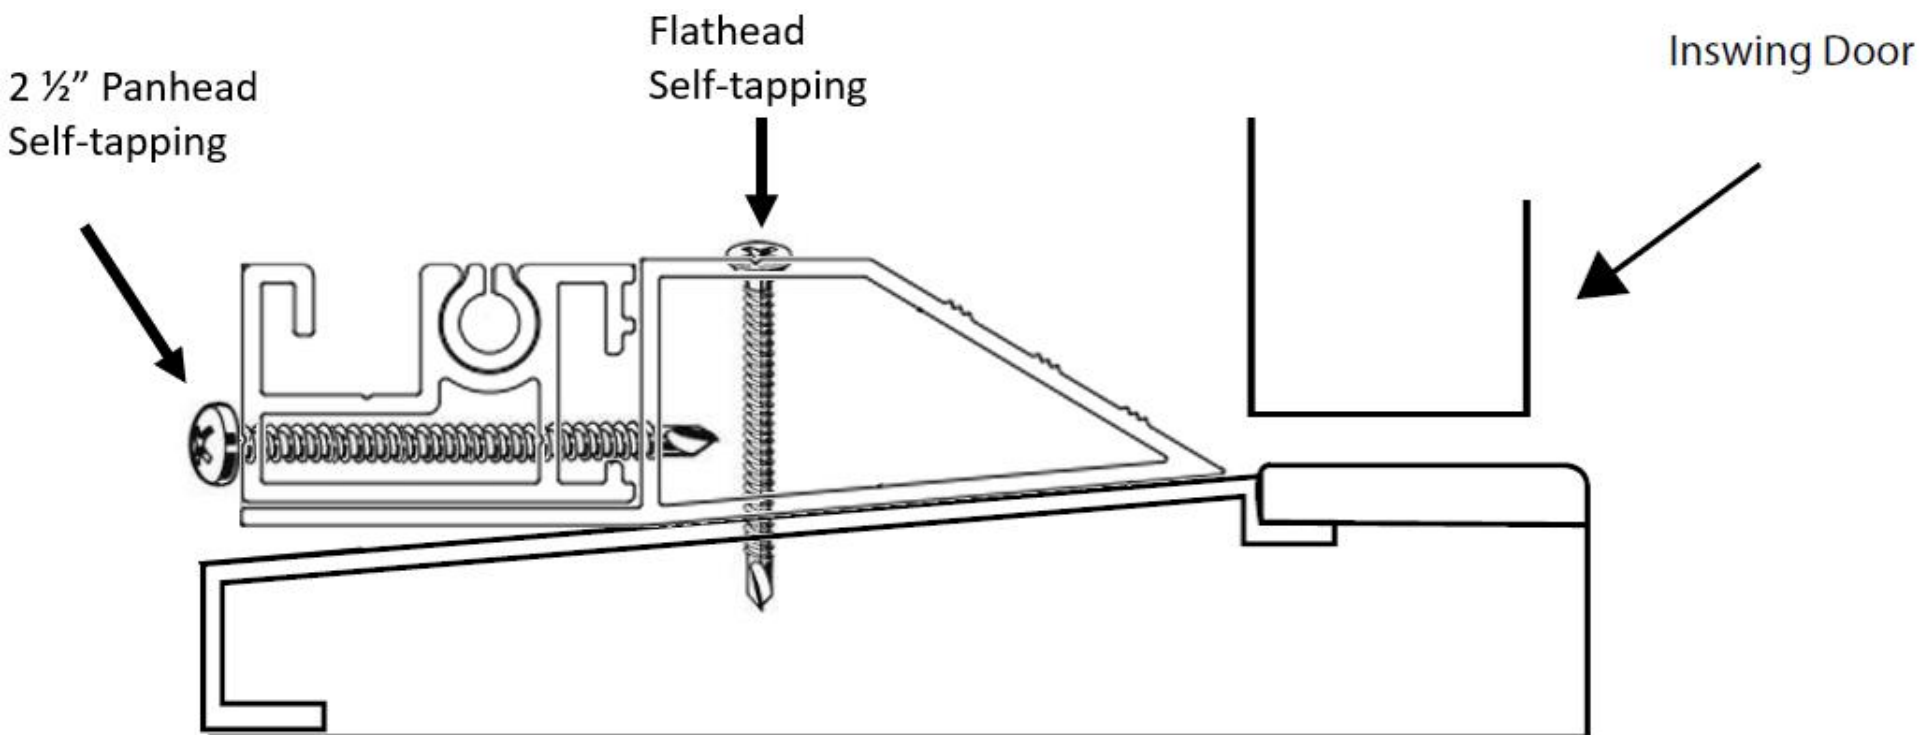

Do NOT use a drill to wind spring  
**Do NOT exceed 25 turns from 0**

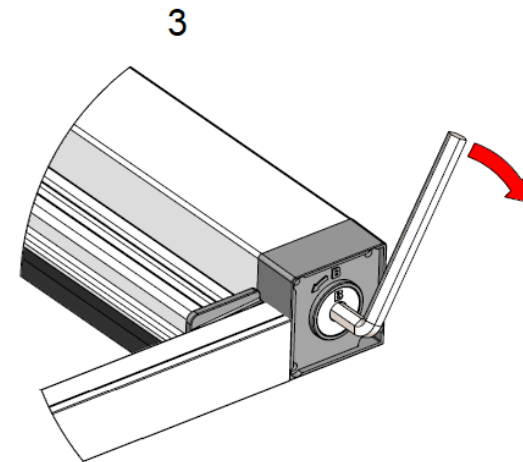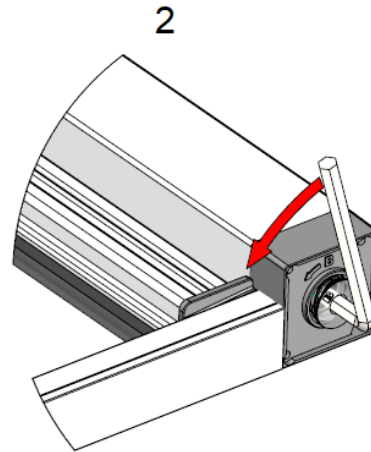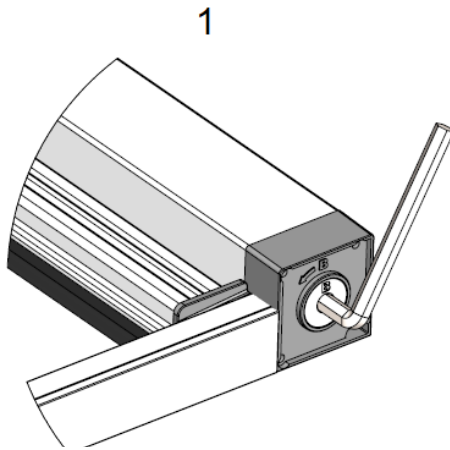


**1** To tension spring insert 8mm hex key into the top tensioner:  
IMPORTANT: Only rotate the TOP tensioner (marked 'A' for RH  
opening screens and 'B' for LH opening screens)

**2** Rotate in the direction of the arrow shown on  
the endcap. A number of turns can be made  
to achieve the desired tension.


**3** Once tension is achieved carefully allow  
the tensioner to re-seat itself back into  
the endcap before removing the hex key.  
(Spring tension will hold it in place)

Do NOT use a drill to wind spring  
**Do NOT exceed 25 turns from 0**

1

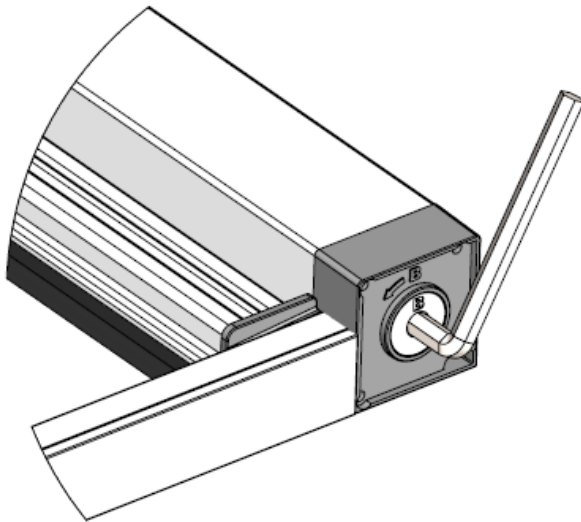

2

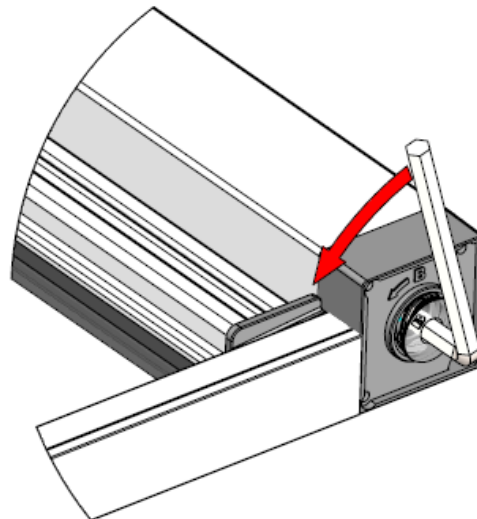

1. Insert 8mm hex key into top tensioner
2. Rotate in the direction of the arrow shown on the endcap until tensioner is fully out.
3. Allow to rotate in **opposite** direction the desired number of turns. Then apply pressure, allowing tensioner to re-seat itself.