




Fixing can be to either:


- 1) Wall frame (during installation)
- 2) Floor (during installation)

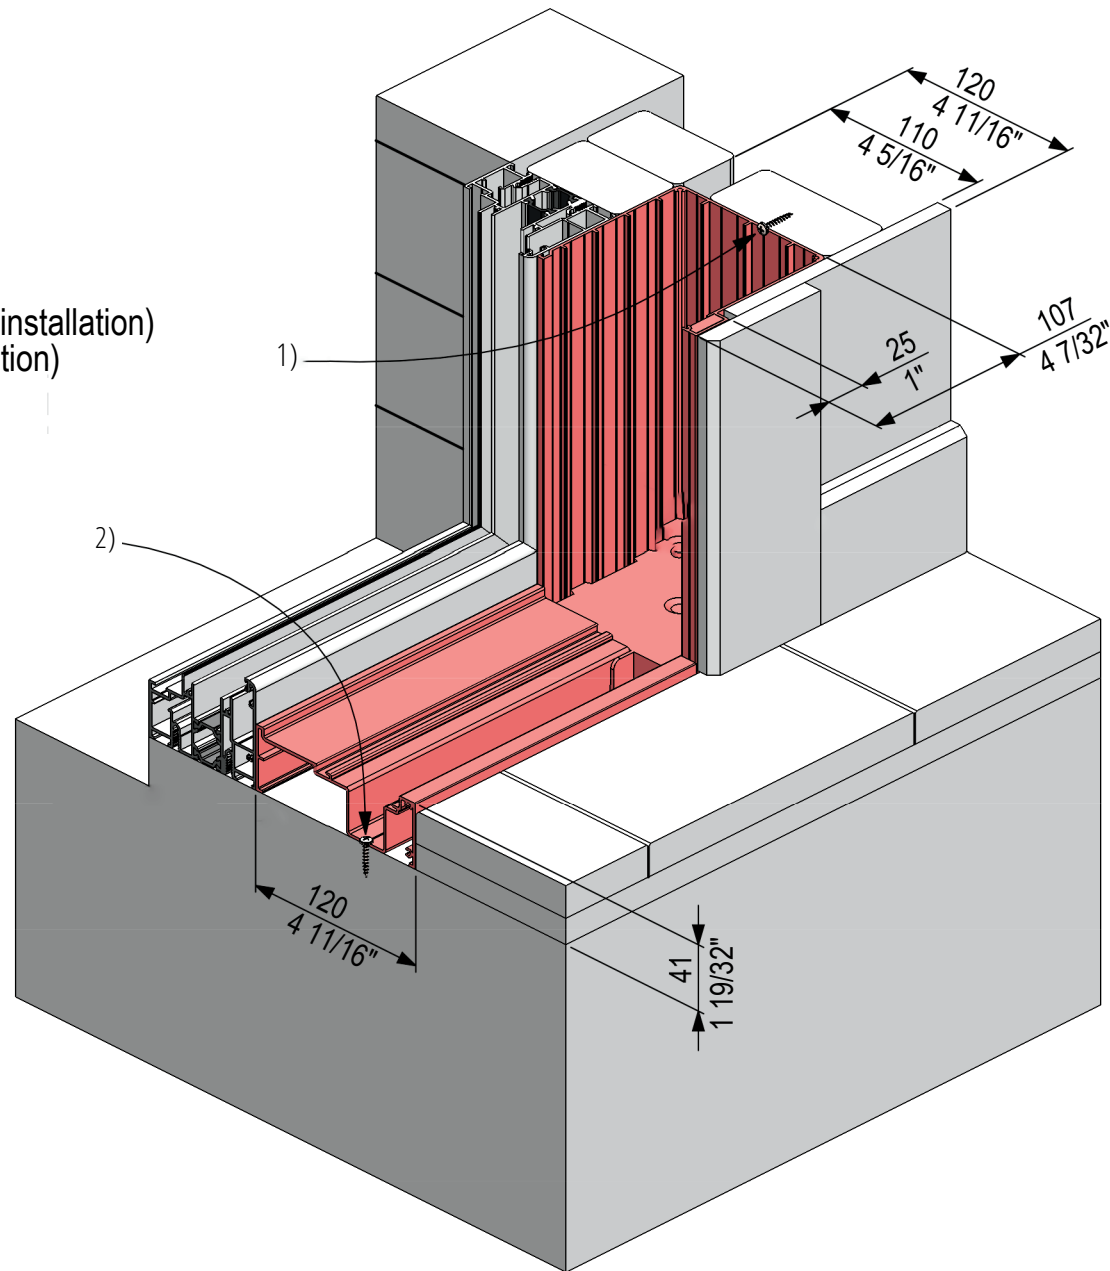


Allow min. 1/4" space between integrated frame and rough frame members for shimming (not shown).

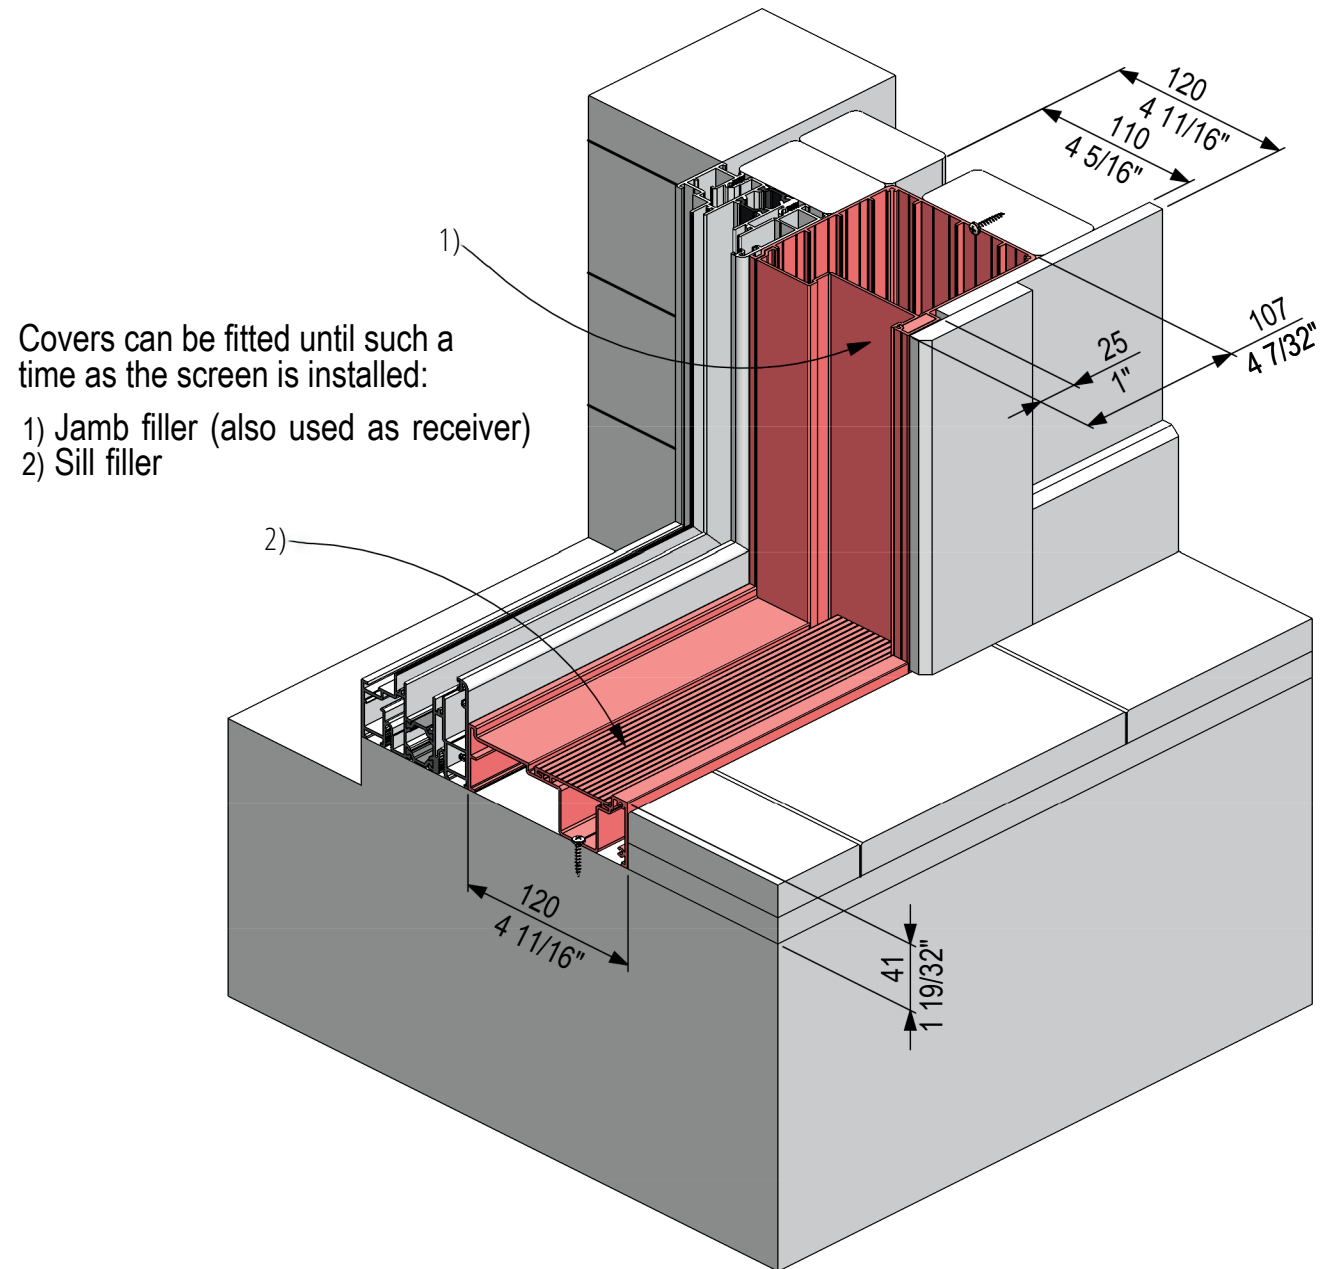


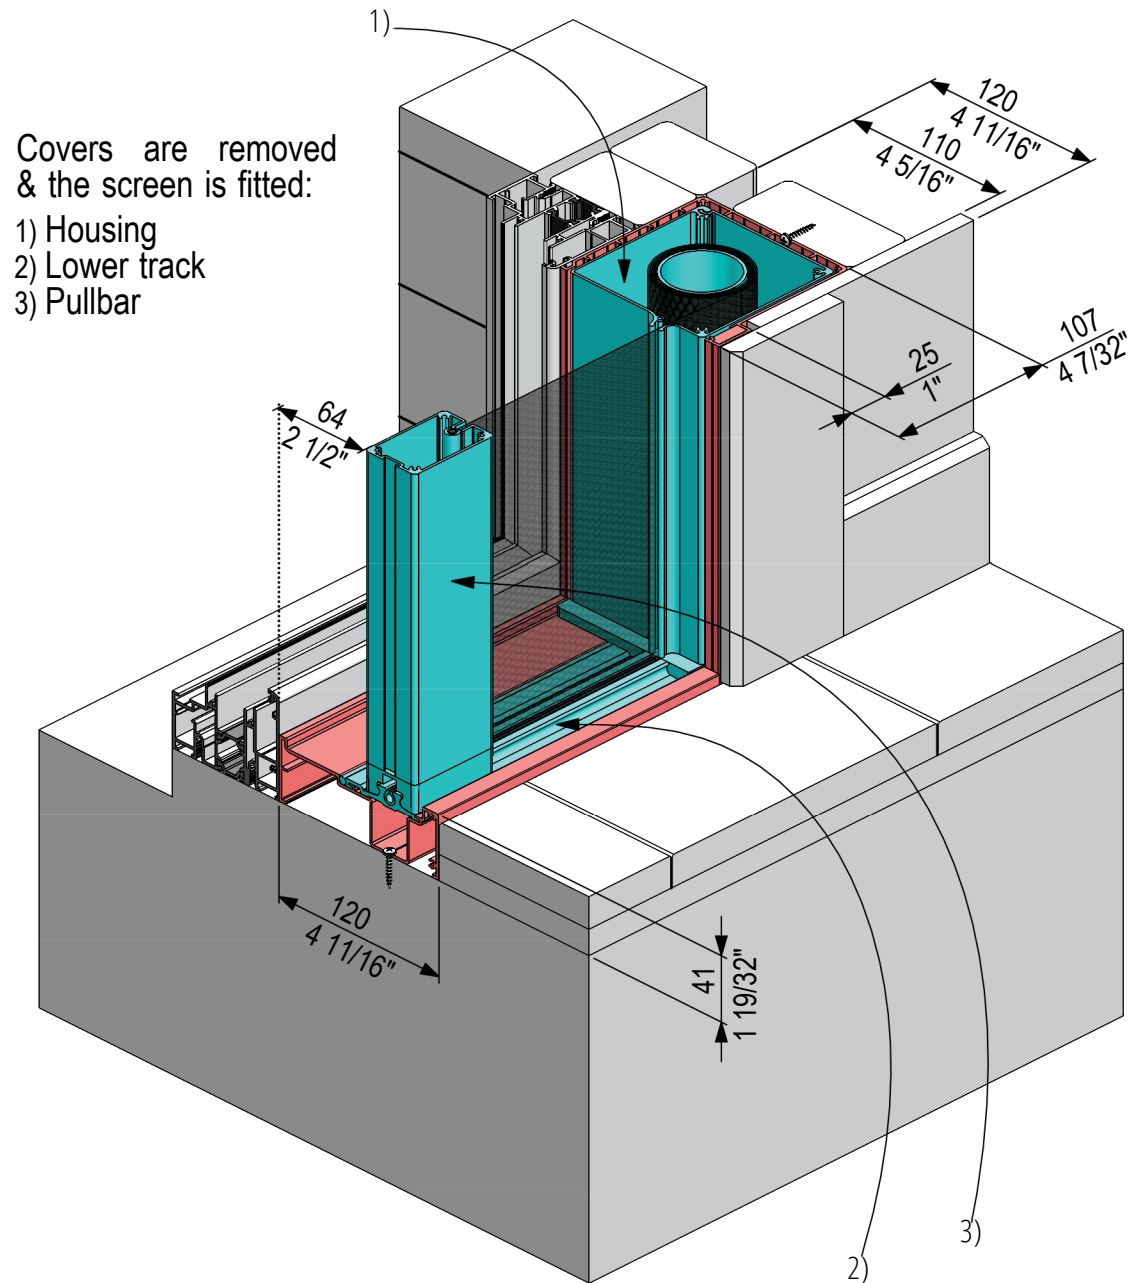

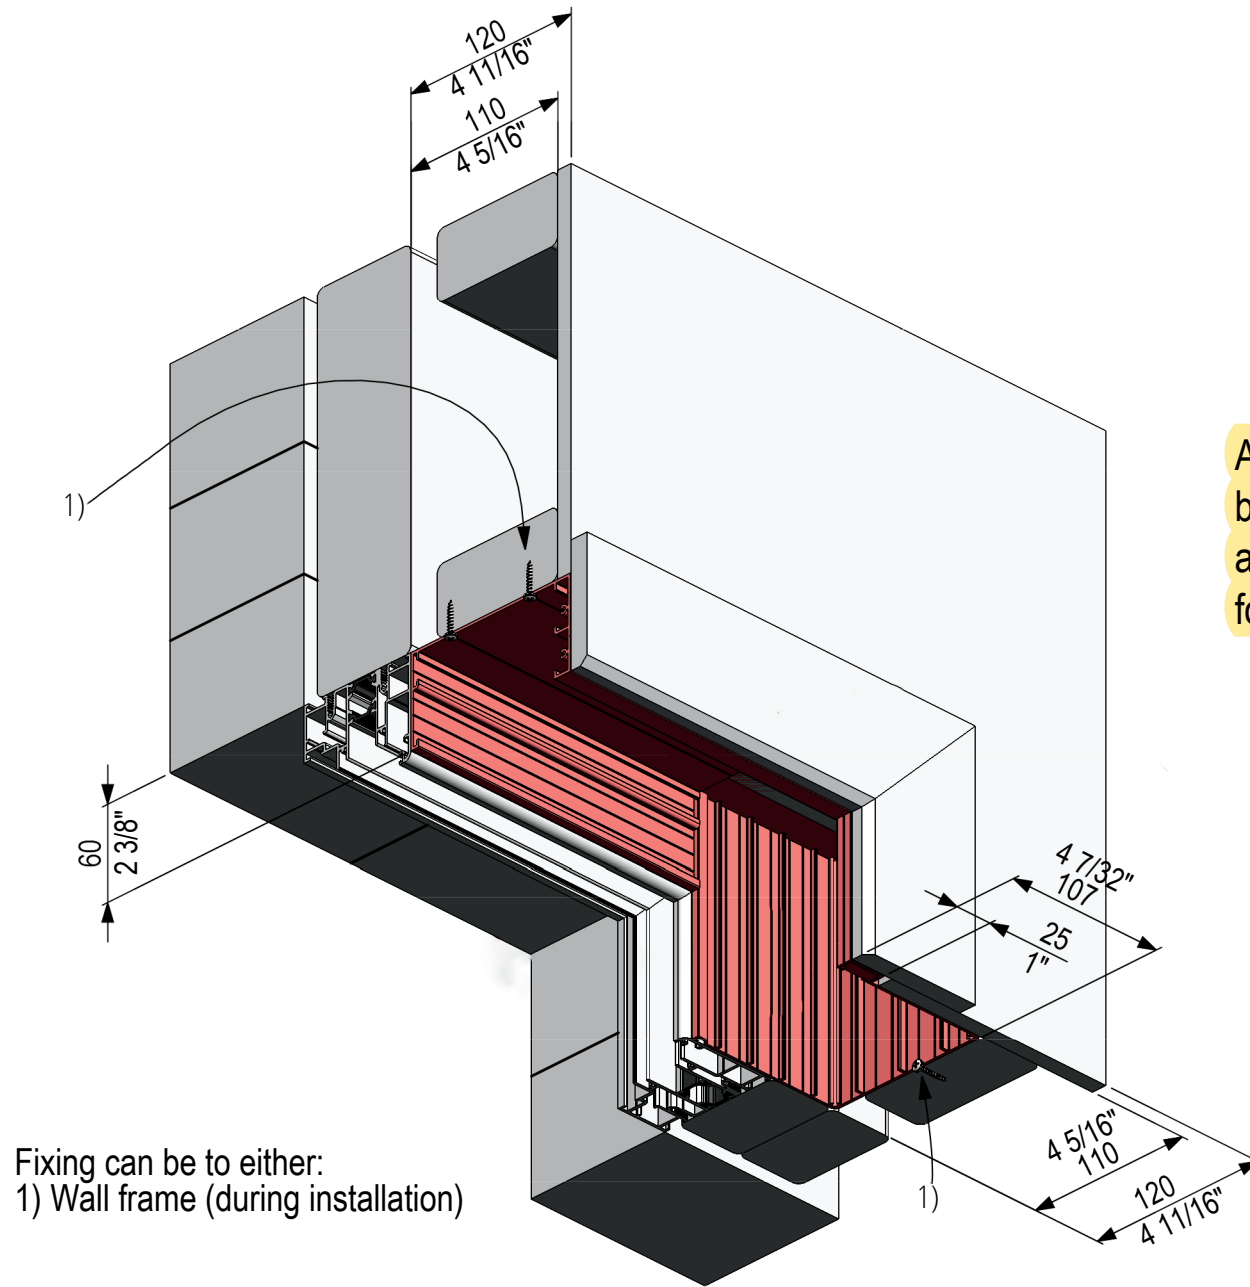

Fixing can be to either:
1) Wall frame (during installation)

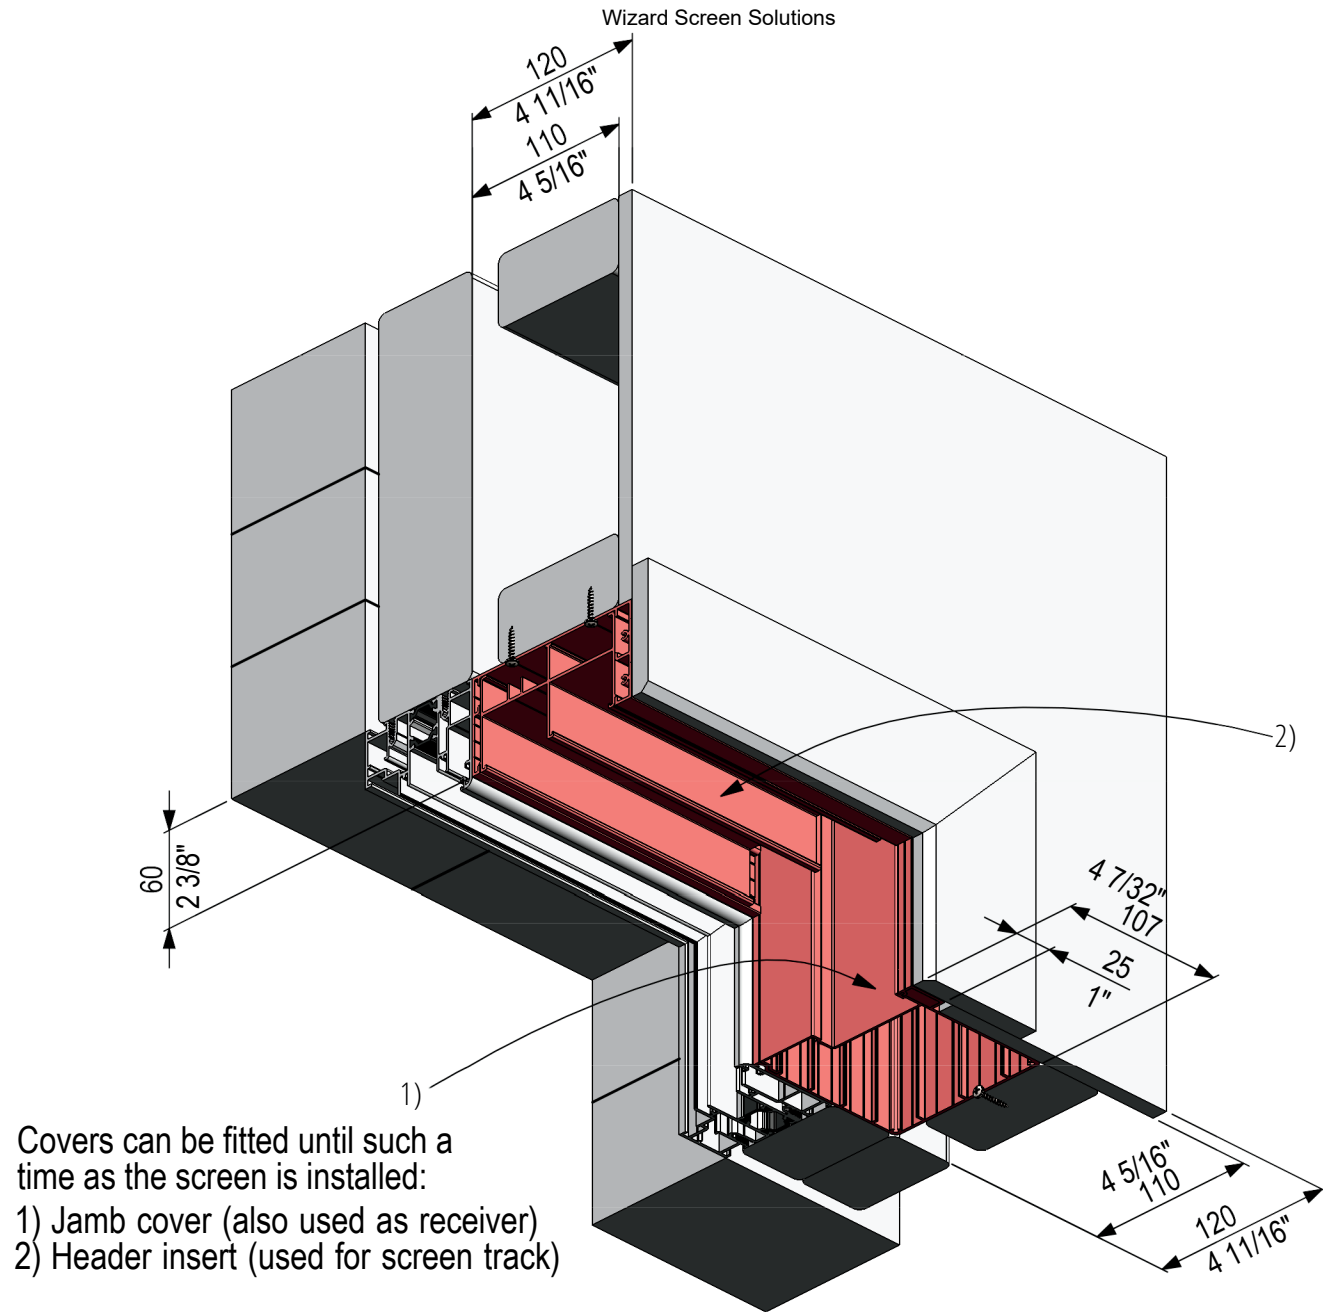

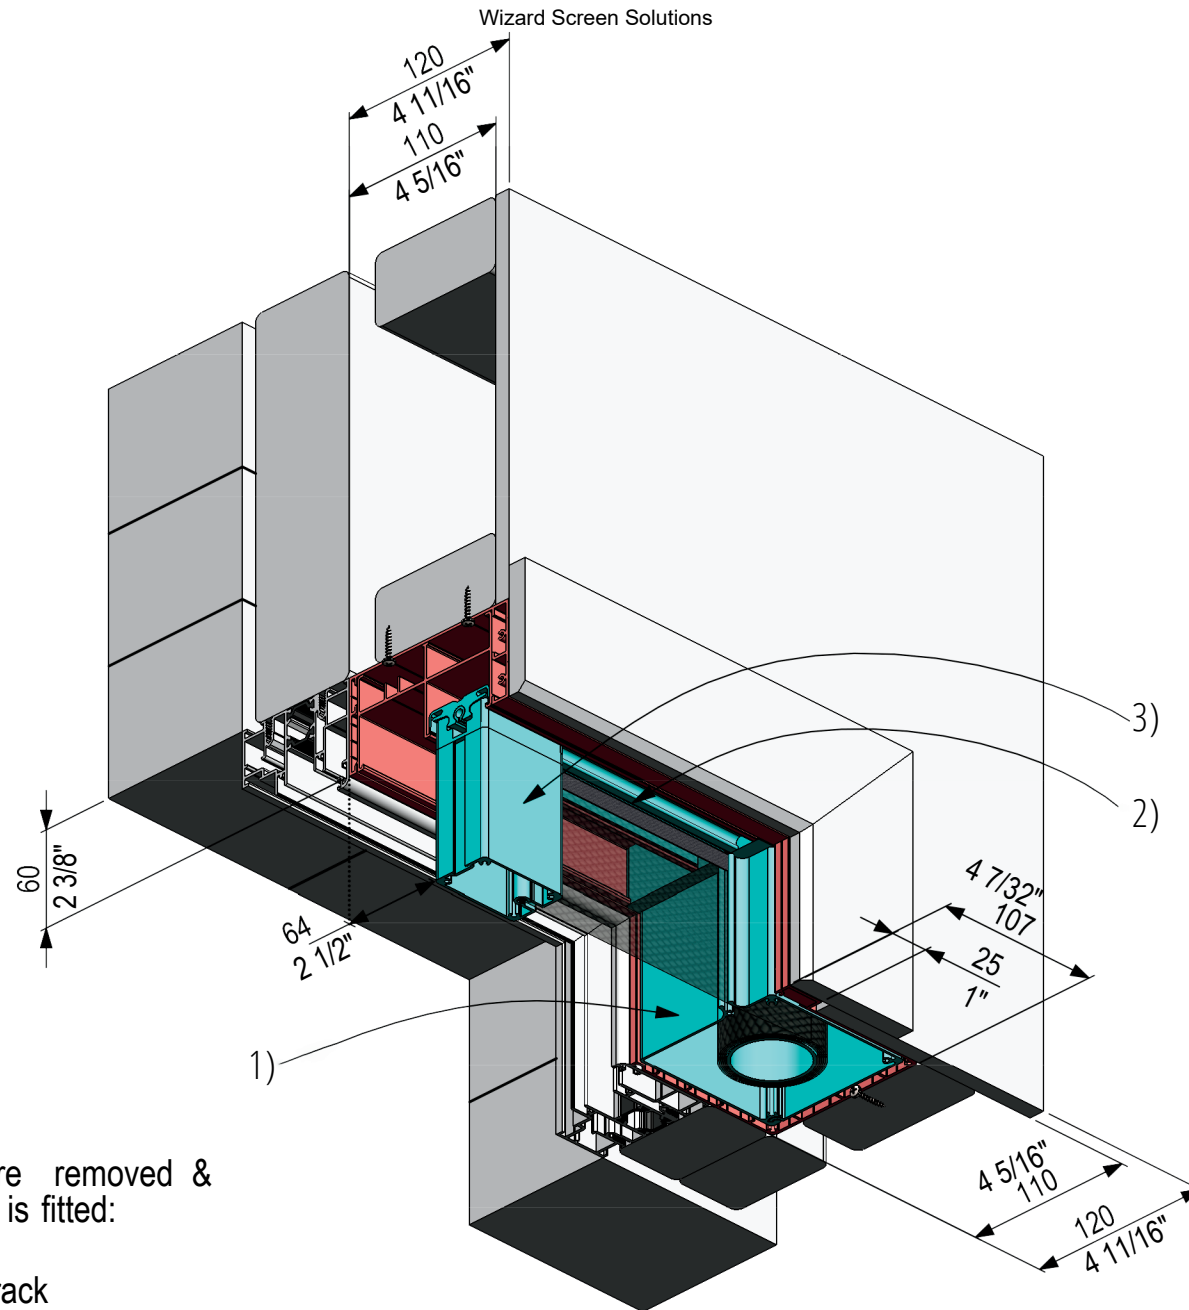

Covers are removed & the screen is fitted:

- 1) Housing
- 2) Upper track
- 3) Pullbar