

Vista View & Vista View ™ Plus

Overview





A View Towards **Excellence**

VistaView[™] VistaView[™]

Contents

Vis	VistaView™ screens			
Inti	ntroducing the NEW VistaView™ Plus			
1.	Screen Material	. 5		
2.	Colours	. 5		
3.	Applications	. 6		
4.	Housing Sizes and Maximum Unit Dimensions	. 8		
5.	Mounting	. 8		
6.	Handing & Orientation	. 9		
7.	Fastening	10		
8.	Recessed Option	11		
9.	Additional Options	12		
10.	Other Considerations	13		



VistaView[™] screens are thoughtfully designed to provide a contemporary look, simplistic to use, and ensure reliable, superior performance.





Patented Auto-Stop

The handle features a turn function for full control and unlimited brake points. The pull-bar stops anywhere along the tracks upon release, ensuring simple operation.



Captured Mesh

Specialized equipment welds the mesh to the zipper. The tracks capture the zippers, and the mesh is retained at all times. No blowouts, frayed mesh or pets on the loose!



Recessed Track

The lower track can be recessed, providing a smooth transition and flush appearance to suit certain applications.



Introducing the NEW VistaView™ Plus



VistaView™ Plus unique features:

Metal Handle: The handle is painted metal, rotationally-symmetrical, and low-profile. Latch System: Receiving-end latches allows the user to easily latch & seal the pull-bar, and to just as easily disengage when retracting. Instead of magnets, mohair is utilized.



1. Screen Material


The beauty of the customer's panoramic view is maintained with the pleat-less mesh used in all of Wizard's systems.

Meshes available for VistaView™ & VistaView™ Plus are provided by PHIFER.



Current offerings as of September 5, 2024







2. Colours

Standard colours are custom formulated for Wizard Screens by AkzoNobel



RAL & custom colours options are possible.


Current offerings as of September 5, 2024

Anodize, Black, Bronze, Sandalwood, White





3. Applications

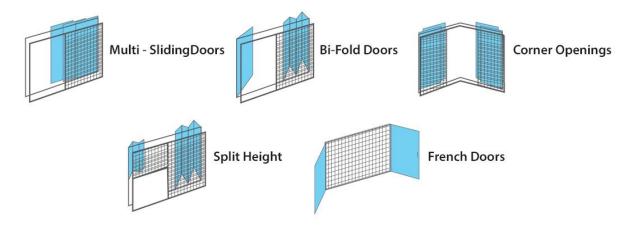


Double screens

50:50 splits *or* **off-centre splits**. I.e. The tracks can meet at a location *other than centre*. *NOTE: Pull-bars *cannot* pass beyond the **intermediary track joiners**.





90° Corners - possible in post-less openings.

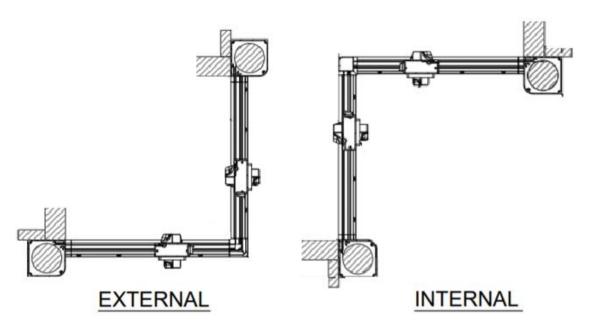

Ex. Internal Corner



*NOTE: The handle heights are offset 4 1/2".



4. Housing Sizes and Maximum Unit Dimensions

	Single (W x H)	Double (W x H)
60 mm [2 3/8"]	6' x 10'	12' x 10'
70 mm [2 ¾"]	10' x 10'	20' x 10'
80 mm [3 1/8"]	14' 6" x 11'	29' x 11'

5. Mounting

The VistaView[™] & VistaView[™] Plus can be mounted: (1) face-fit; (2) under-header/in-jamb fit; or a combination.









6. Handing & Orientation

Handing is determined as if looking at the FRONT of SCREEN

LEFT-hand



RIGHT-hand




	LEFT-handed Screen (blue man looking LEFT)	RIGHT-handed Screen (blue man looking RIGHT)
Mesh and tracks further from door	FRONT	B FRONT
Mesh and tracks closer to door (more common)	FRONT	D FRONT



7. Fastening

Housing


VistaView™ & VistaView™ Plus **housings** can be fastened through the *front, back,* or *inside* locations.

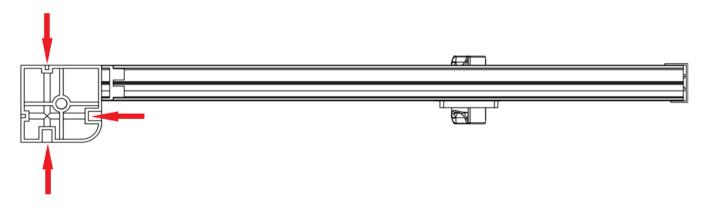

Tracks


Upper & Lower Tracks are identical.


Tracks can be fastened with screws oriented vertically or horizontally to suit install.

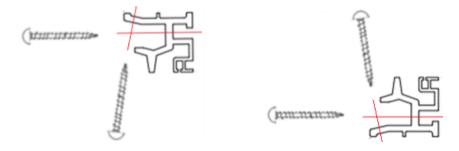

Track Covers (optional)

These are applied to the tracks to conceal the screws. Available in black, white, and grey.



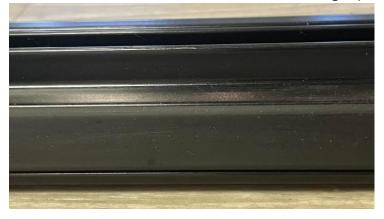



8. Recessed Option

Lower tracks and lower housing endcap can be recessed into a recess channel & cup.



See Recessed Installation Video

*NOTE: Recessing for an *exterior* application is **highly NOT recommended** due to more than usual dirt, debris, and water build-up, hence requiring more frequent maintenance.






9. Additional Options

Sill Adapters

Available in 80" lengths. Orderable under "RetractaView Parts".

*UPDATE (Feb '24) "Interior" and "Square" available in 160" lengths in mill, white, black, and sandalwood colours. Orderable under "RetractaView Parts" and "VistaView Parts".

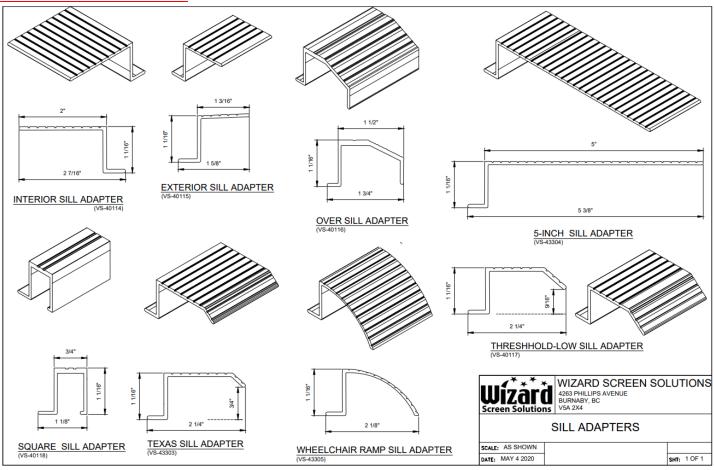




A View Towards **Excellence**

VistaView[™] VistaView[™]

<u>L-Flaps</u>

Can be used to conceal gaps. Can affix with double-sided tape. Available in **96" lengths**. Orderable within "RetractaView Parts".







*NOTE: Sill Adapters (except "Interior" & "Square") and L-Flap standard colours do *not* match VistaView™ & VistaView™ Plus standard colours exactly.

10. Other Considerations

Concealing

The housing and upper track should not be concealed. Otherwise, ensure they can be removed easily in the event the screen requires servicing. Do not embed the upper track into the header nor ceiling. It is the responsibility of the builder to develop removable trim work.

See Recessed Installation Video

Exterior Applications

If **lower tracks** are mounted on top of the threshold on the exterior where it is exposed to weather, it is recommended that *weep holes* be drilled through the **tracks**. Pilot holes should be applied with dabs of **silicone sealant** before **tracks** are fastened.

Recessing for an exterior application is **highly NOT recommended** due to more than usual dirt, debris, and water build-up, hence requiring more attention and maintenance.