

VistaView™ Overview

VistaView™ Classic



VistaView™ Plus



Contents

1. VistaView™ Classic	3
2. VistaView™ Plus.....	4
3. Latest Screen Materials and Standard Colours.....	6
4. Applications	6
5. Housing Sizes & Maximum Unit Dimensions	8
6. Mounting	8
7. Handing & Orientation	9
8. Fastening	10
9. Recessed Option	11
10. Additional Options	12
11. Other Considerations	13
12. Partners for These Products	14


1. VistaView™ Classic

VistaView™
Classic



Patented Auto-Stop

The handle features a turn function for full control and unlimited brake points. The pull-bar stops anywhere along the tracks upon release, ensuring simple operation.



Captured Mesh

Specialized equipment welds the mesh to the zipper. The tracks capture the zippers, and the mesh is retained at all times. No blowouts, frayed mesh or pets on the loose!



Recessed Track

The lower track can be recessed, providing a smooth transition and flush appearance to suit certain applications.

2. VistaView™ Plus

VistaView™ Plus




Metal, Low-profile Handle

- Wet-painted metal
- Rotationally-symmetrical
- Low-profile projection

Latch System

- Wet-painted metal
- Latch instead of magnet
- Easy to disengage from receiver

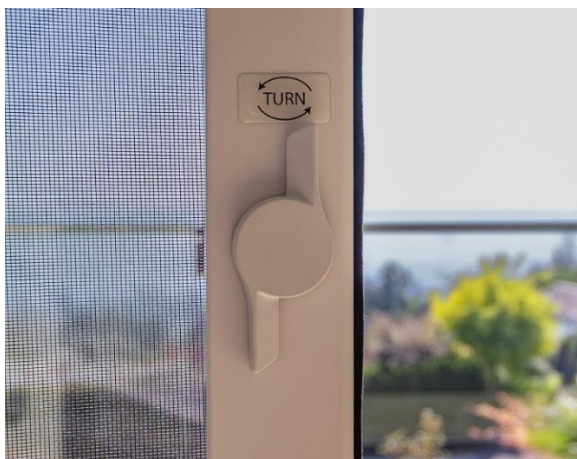

VistaView™ Plus

Low-profile (LP) Lower Track Option

- ½" height
- Suitable for low-threshold applications



Square Housing Option

- Square housing profile optional
- Modern, clean appearance



Metal Housing Endcaps

- Wet-painted metal
- Aesthetically premium appearance
- Built-in guides – no track guides required

Large Opening Sizes


- Maximum 43'W x 12'H
- Accommodates architectural glazed doors & openings




3. Latest Screen Materials and Standard Colours

[Screens & Shade Solutions - Built Better | Wizard Screens & Shades](#)

Up-to-date “Supplier Resources” available in marketing tab via [Wizard Screens & Shades Order Portal](#)



4. Applications

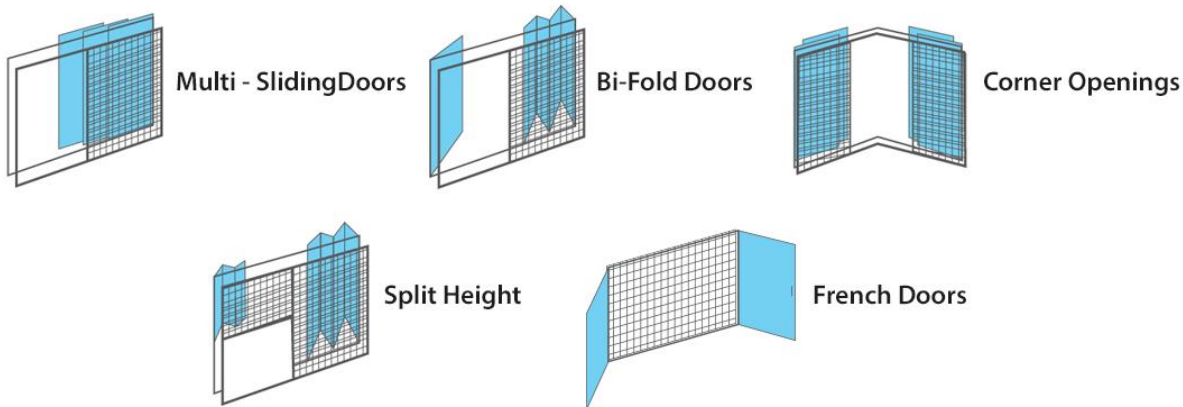


Double screens

50:50 splits or off-centre splits. I.e. The tracks can meet at a location *other than centre*.

***NOTE:** Pull-bars *cannot* pass beyond the **intermediary track joiners/latches**.

90° Corners - possible in post-less openings.

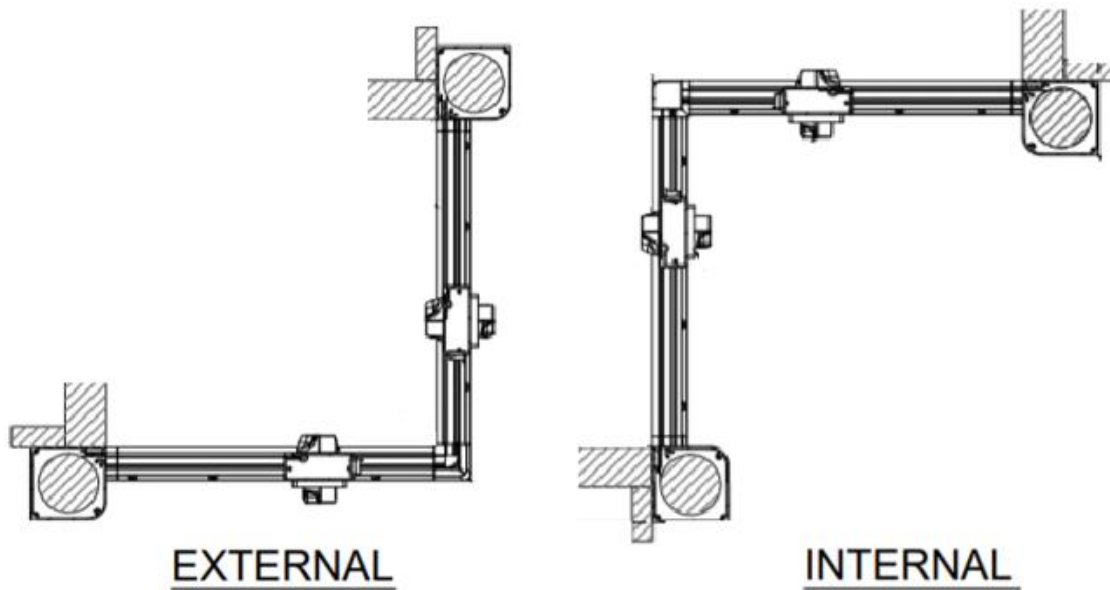

Ex. Internal Corner

VistaView™ Classic shown



***NOTE:** The handle heights are offset 4 ½".

5. Housing Sizes & Maximum Unit Dimensions

		Housing Size	Single (W x H)	Double (W x H)
VistaView™ Plus	VistaView™ Classic	60 mm [2 3/8"]	6' 6" x 10'	13' x 10'
		70 mm [2 3/4"]	10' 6" x 10'	21' x 10'
		80 mm [3 1/8"]	14' 6" x 12'	29' x 12'
		100 mm [4"]	21' 6" x 12'	43' x 12'

6. Mounting

Mounting methods: (1) face fit; (2) in-jamb; or a combination.

VistaView™ Plus shown




7. Handing & Orientation


Handing is determined as if looking at the **front** of screen unit.

VistaView™ Classic shown

LEFT-hand

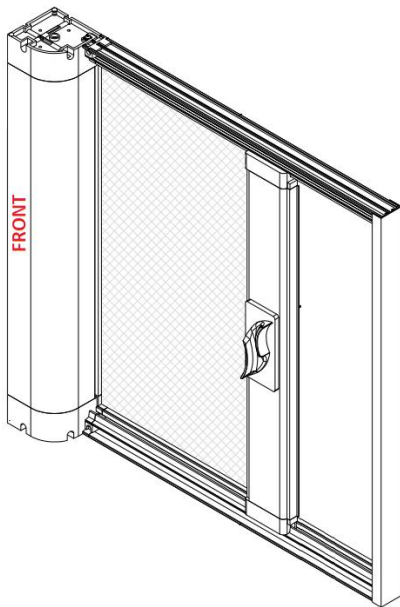

RIGHT-hand

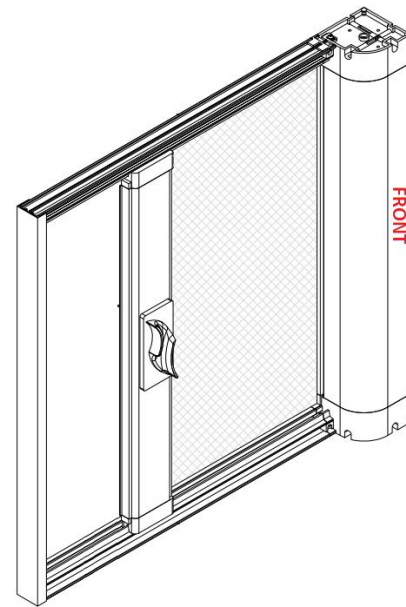

	LEFT-handed Screen (blue man looking LEFT)	RIGHT-handed Screen (blue man looking RIGHT)
Mesh and tracks further from door	A	B
Mesh and tracks closer to door (more common)	C	D


8. Fastening

Housing

The **housing** can be fastened at the **endcaps** through the *front*, *back*, or *inside* locations.


*For VistaView™ Plus with LP lower track, applicable only for **top endcap** (not shown)

VistaView™ Classic shown

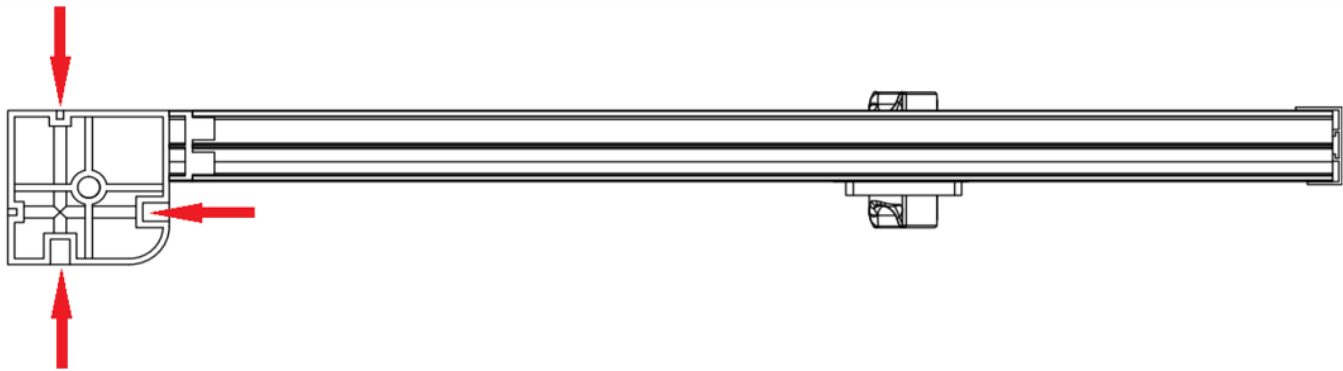


Tracks

Standard Track: Screws can be oriented *vertically* or *horizontally*.

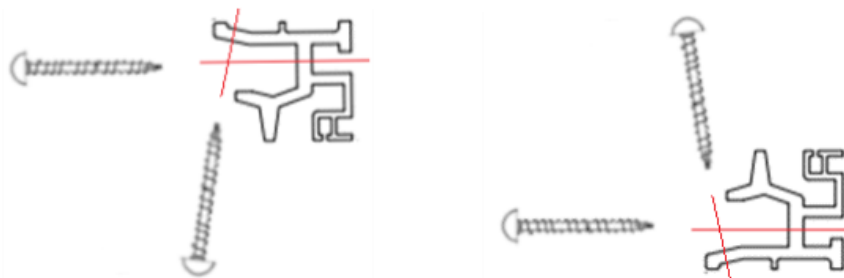


VistaView™ Plus Low-Profile (LP) Lower Track: Screws can be oriented *only vertically*.

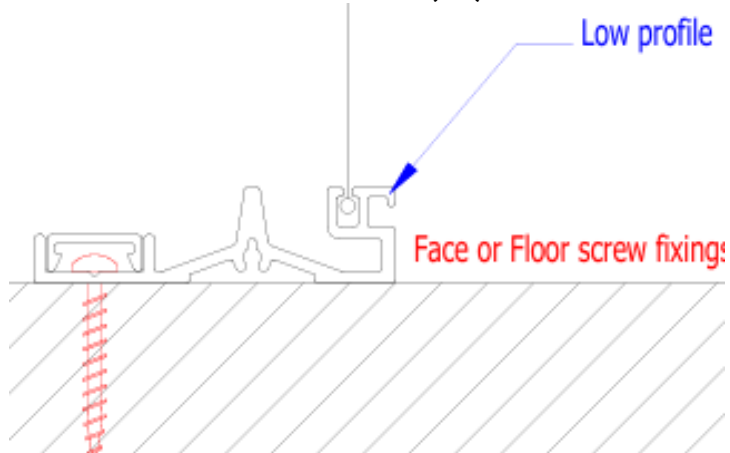

PVC Track Covers (optional)

PVC track covers applied to **standard tracks** to conceal screws. Available in black, white, and grey.

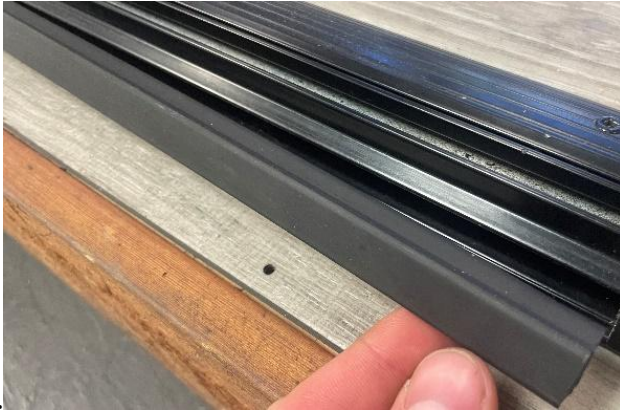

9. Recessed Option

Standard lower track and lower housing endcap can be *recessed* into a recess channel & cup.

*Applicable only to **standard track**.

VistaView™ Classic shown



See [Recessed Installation Video](#)

***NOTE:** Recessing for an exterior application is **highly NOT recommended** as it is subject to more dirt, debris, and water build-up, hence requiring more frequent maintenance.


10. Additional Options

Sill Adapters

Available in **80" lengths**. Orderable under "RetractaView Parts".

"Interior" and **"Square"** available in **160" lengths** in mill, white, black, and sandalwood colours.


Orderable under "RetractaView Parts" and "VistaView Parts".

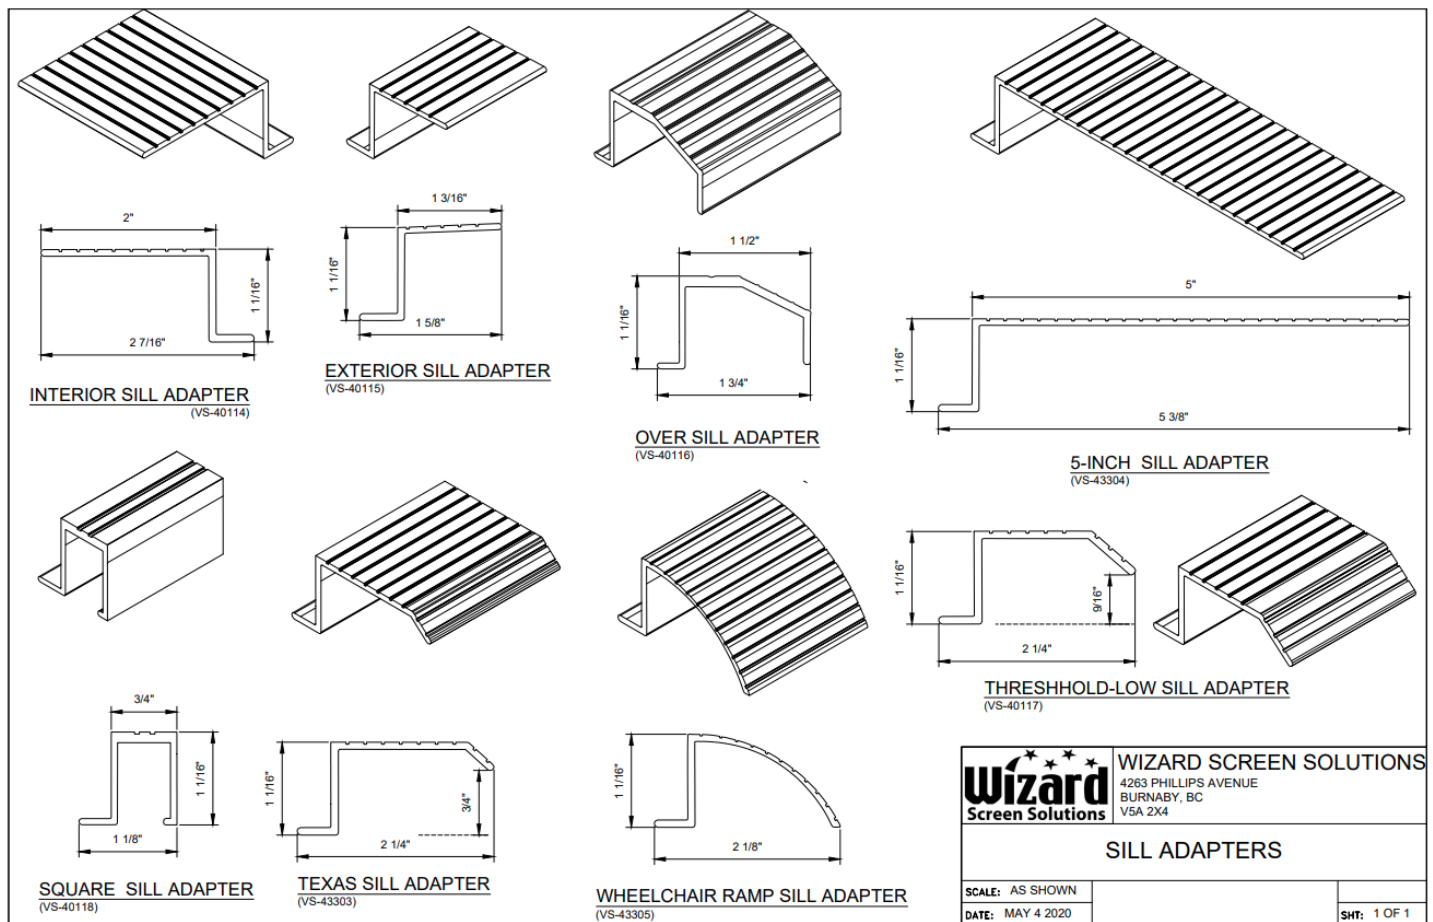

L-Flaps

Can be used to conceal gaps. Can affix with double-sided tape. Available in **96" lengths**. Orderable within **"RetractaView Parts"**.

L-FLAP

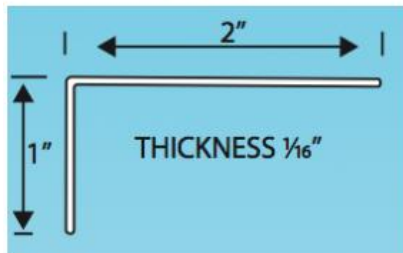

DOUBLE SIDED TAPE



***NOTE:** Sill Adapters (except "Interior" & "Square") and L-Flap standard colours do *not* exactly match VistaView™ Classic & VistaView™ Plus standard colours.

11. Other Considerations

Concealing

The housing, upper track, and receiver should not be concealed. Otherwise, ensure they can be removed easily in the event the screen requires servicing. Do not embed the **upper track** into the header nor ceiling. It is the responsibility of the builder to develop removable trim work.

Exterior Applications

If **lower tracks** are mounted on top of the threshold on the exterior where it is exposed to weather, it is recommended that *weep holes* be drilled through the **tracks**. Pilot holes should be applied with dabs of **silicone sealant** before **tracks** are fastened.

Recessing for an exterior application is **highly NOT recommended** as it is subject to more dirt, debris, and water build-up, hence requiring more attention and maintenance.

12. Partners for These Products

PHIFER®



A large, bold version of the Wizard Screens & Shades logo, featuring the word "Wizard" in a large, bold, sans-serif font with four stars above it, and "Screens & Shades" in a smaller font below it.

Wizard
Screens & Shades